

cps[®] Automotive

Advanced Tools Smart Solutions

PRODUCT CATALOG



MOTORVAC

cps

VIEW

VACUTECH

ARE YOU READY?  

**AIR CONDITIONING SYSTEMS
ARE SWITCHING TO A NEW REFRIGERANT**

 **R-1234YF**

 488046YF

The Next Generation is Here **cps**[®]

CPS is your ready source of R-1234YF Tools, Equipment and Chemicals!



CPS draws on its long history of design and manufacture of leading tools and instruments for the HVAC/R market to provide automotive service facilities and technicians battle-tested A/C service technology.

From CPS' Revolutionary FX Series A/C Equipment and electronic leak detection to the UView line of clean, injectable A/C oils, dyes and sealants, rely on CPS to help your business achieve A/C service excellence now and in the future.



CPS® Automotive

FX Series Refrigerant Management Center	4-6
A/C Sealant Detection Kit	7
Refrigerant Identifiers	8
Recover, Recycle, Recharge Equipment.....	8-10
Manifolds and Gauges.....	11
Vacuum Pumps	12
Refrigerant Charging Scales.....	13
Electronic Leak Detectors	14
Temperature and System Measurement.....	15
Vacuum Gauges and Tool Bags.....	16
Charging Hoses and Couplers	17
Hand and Specialty Tools	18
Adapters and Valve Cores	19
CPS Replacement Parts.....	20-21

UVIEW

A/C ExtenDye™	24-25
Dyes	25-26
Leak Detection Kits.....	27
LeakGuard™	28-29
LeakGuard™ OneShot.....	30
A/C Oils.....	31-32
A/C Injection Kits	33
UV Leak Detection Lights	34-35
MIST™ In-Vehicle Air Quality	36-37
Coolant Service Solutions.....	38-39
UView Replacement Parts.....	40-41

MOTORVAC®

CoolSmoke HP®	43
Vapor Technology	44-48
MotorVac® GD.....	49
DieselTune™ EGR Cleaning Tool.....	50-51
CarbonClean® 1000	52
CarbonClean® 245.....	53
CarbonClean® Dual	54
DieselTune™	55
TransTech™ IV+.....	56
TransTech™ III+	57
SteerClean™ 1000.....	58
CoolantClean™ III	59
CarClean™	60
CoolSmoke®.....	60
Diff-Vac™ 1000.....	61
BrakeVac™ II	61
MotorVac® Chemicals	62-63

Reasons customers chose to INVEST IN AN FX UNIT

Certified to SAE standards



THE NEW GOLD STANDARD

In Refrigerant Management



FX134a For R134A vehicles

Main reasons customers purchased the FX134a:

- Fully automatic
- Setup and training included
- Hybrid ready
- 1-2-5 warranty

Customers that purchased the FX134a also purchased:

FX3030X1	Filter maintenance kit
FXCC	Machine cover
ACDB18	Updated vehicle database for machines purchased prior to 1/1/2019

FX1234 For R1234YF vehicles

Main reasons customers purchased the FX1234:

- Fully automatic
- Contains refrigerant ID
- Setup and training included
- Hybrid ready
- 1-2-5 warranty

Customers that purchased the FX1234 also purchased:

FXP1	FX1234 maintenance kit
FXCC	Machine cover
ACDB18	Updated vehicle database for machines purchased prior to 1/1/2019

FX3030 For R134A/R1234YF vehicles

Main reasons customers purchased the FX3030:

- Dual refrigerant convertible
- Converts in ten minutes
- Contains refrigerant ID
- Setup and training included
- Hybrid ready
- 1-2-5 warranty

Customers that purchased the FX3030 also purchased:

FXP2	FX3030 maintenance kit
FXCC	Machine cover
ACDB18	Updated vehicle database for machines purchased prior to 1/1/2019



**1 Year Parts and Labor
2 Years Parts Only
5 Years Compressor**

FX SERIES REFRIGERANT MANAGEMENT CENTER

CPS Automotive presents the latest in ease and endurance with its FX Series Refrigerant Management Centers that quickly and efficiently recover, recycle, and recharge automotive A/C systems.

FEATURES

- 7" Color touch screen control panel
- 1-2-5 Warranty
- Displays maximum load up to 220 lbs. (up to 100 kg)
- Foam-filled wheels
- Refrigerant Management System monitors filter life and refrigerant usage
- Hybrid compatible
- Patented unique, fast (10 minutes) and complete refrigerant changeover system
- Supports multiple languages/UOM
- Quickly access all functions from the main screen
- 'Car Health' Mode enables printing a snapshot of pressures before and after service
- Dual handle bars/hose drapes



12.67cc OILLESS COMPRESSOR

- 30% larger displacement than the competition
- Designed and built by CPS for high capacity commercial applications
- Eliminates failure issues due to improper oil filling of traditional compressors


MOTOR-CONTROLLED BALL VALVES

- Opens wider for greater flow
- Resistant to clogging of debris or sealants


SPECIFICATIONS

- Thermal printer standard on all models
- Vehicle database (included). Refrigerant and oil charging data
- 50 lb recovery tank (two with FX3030)
- Recovery rate = Up to 1 lb/min
- 6 CFM vacuum pump/ 10 micron rated
- 3.5" gauges
- 10' power cord
- 115v, 850 W

Replacement Parts and Accessories on pages 20-21

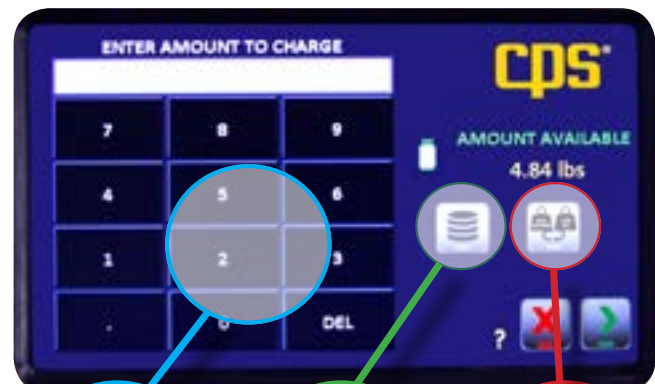

Fully interactive touch-pad



Access database



Quickly change unit of measurement



FX1234 and FX3030 units include refrigerant identifier



ACDB18
2018 Vehicle model year and older refrigerant identifier A/C Database

Part No.	Certification	Refrigerant	Dimensions (inches)				UPC	HTC
			H (in)	W (in)	D (in)	Weight (lb)		
FX134A	SAE J2788H	R-134a	47.5	27.5	25	208	750377134012	8415.83.90
FX1234	SAE J2843	R-1234YF	47.5	27.5	25	208	750377123405	8415.83.90
FX3030	SAE J3030	R-134a & R-1234YF	60	27.5	25	240	750377303012	8415.83.90

REPLACEMENT ITEMS

FX3030X1	FX Series Maintenance Kit - Includes Filter, Vacuum Pump Oil and Coupler O-Rings
FX3030X2	FX Series Oil Drain Bottle Assembly
FX3030X18	FX Series 10' Low Side Service Hose - FX1234/FX3030
FX3030X19	FX Series 10' High Side Service Hose - FX1234/FX3030
FX3030X52	FX Series 10' Low Side Service Hose - FX134A/FX3030
FX3030X53	FX Series 10' High Side Service Hose - FX134A/FX3030
AR2788X14A	FX Series Tank refill hose - FX134A
FA1234X36	FX Series Tank refill hose - FX1234



FX SERIES KITS

Everything you need to be SAE compliant! Includes oil injection kit, electronic leak detector, filter maintenance kit and digital thermometer.

FXP1 with HFO oil injection kit
FXP2 with dual oil injection kit



FILTER MAINTENANCE KIT

Includes filter, vacuum pump oil and coupler o-rings.

FX3030X1 Filter Maintenance Kit
ARXF5 Filter only



FX SERIES DUST COVER

Durable, water-repellent, fitted nylon cover with Velcro slit for easy removal.

FXXC Dust Cover



Easy to use test cartridge



Special hose assembly connects to high side



Flow meter quickly indicates presence of sealant



ACSD
A/C Sealant Detection Kit

Kit Contents:

- (10) Test Cartridges*
- R-134A and R-12 couplers
- Test Hose
- A/C Sealant Detector Cartridges (25 pack) ACSD25
- Flow Meter
- Syringe
- Custom molded carrying case
- Detailed Instructions

ACSD A/C SEALANT DETECTION KIT

- Quickly verify if sealant is present
- Prevent damage to recovery equipment
- Easy to use with instant results
- Works on R-134a and R-12 systems

AVOID EQUIPMENT DAMAGE AND REVENUE LOSS

The CPS A/C Sealant Detection Kit is a must for every A/C technician. It quickly lets you know if there is harmful sealant in the vehicle's A/C system, helping you avoid damage to your refrigerant recovery equipment.

SEALANTS CAN VOID WARRANTY

Both professional technicians and vehicle owners are routinely using sealants in mobile A/C systems. Most of these A/C sealants react with moisture and air to create a seal. They are carried through the system by the refrigerant oil and escape through the hole in the system and solidify to form a seal.

These sealants can enter A/C components and your recovery machine and cause damage by solidifying in solenoids and tubing. In many cases, component and recovery equipment manufacturers are voiding warranties caused by A/C sealant damage.

UNIQUE, SIMPLE-TO-USE DESIGN

The QuickDetect system comes with everything you need to do a quick and easy test – A/C coupler, hose, test cartridge, and flow meter. When connected to the A/C system, QuickDetect is designed to mimic an A/C leak. If sealant is present in the system, it will quickly solidify in the disposable test cartridge and cause the flow meter to show “No Flow”. Except for the low-cost test cartridges, all QuickDetect components are reusable. Additional cartridges are available separately.

REPLACEMENT ITEMS

ACSD25 A/C Sealant Detector Cartridges - 25 Pack



REFRIGERANT IDENTIFIER

Setting the standard for performance, accuracy, and portability. It's smarter, faster, and more portable than any refrigerant identifier you've ever used. Innovative and ergonomic design and special capabilities deliver the features and benefits today's professional A/C technicians want.

RI2004DX	R-134a and R-12
RI2004DXP	R-134A and R-12 w/printer
RI2012YF	R-1234YF and R-134A
RI2012YFP	R-1234YF and R-134A w/printer
RIMINI	R-134A, Go/No Go w/manual pump



CPS® RECOVER, RECYCLE, RECHARGE SYSTEM

Unit is only for sale outside US for dual refrigerant use.

- Fully automatic operation of recovery, recycle, evacuate, air purge and recharge
- Patented flow control
- 2/3 HP oilless compressor
- All steel construction offers superior mobility with heavy duty casters
- Charges high and low side (or both)
- Flow control technology enables faster and more accurate recovery, recycling and recharging

- Includes 8' hoses and 50 lb storage tank
- Easy to program with simple command-based LCD display supports five languages (English, French, Spanish, German & Chinese).

FA1000 R-134a

FA1234 R-134a & R-1234yf (Not available in U.S.)
Replacement Parts and Accessories on pages 20-21



CPS® RECOVER, RECYCLE, RECHARGE SYSTEM

The AR2700 Series of semi-automatic RRR machines incorporate ball valves instead of solenoids and check valves in the recovery and evacuation flow path. Both of these components are susceptible to in-field failure when exposed to foreign contaminants such as aftermarket A/C sealants, loose desiccant, and other particles that cause them to leak or seal closed. The AR2700 can be run with a selectable valve for low, high or both in recovery, recycling and recharge mode and comes with a 50 lb tank, or purchase a 90 lb tank separately.

- Semi-automatic
- AR2700M supports multiple refrigerants
- Includes 'pump-down' feature (clears the machine when changing to another refrigerant to avoid cross contamination)
- All metal cabinet construction
- Built-in tool drawer
- Selectable operating language
- 8' hoses with manual couplers (Optional longer hoses for large trucks, container etc.,) 50 lb storage tank

AR2700 R-134a

AR2700M Multiple Refrigerants

AR2700TA Large Capacity Applications

Replacement Parts and Accessories on pages 20-21



Visit us online at cpsproducts.com

NEW



PORTABLE REFRIGERANT RECOVERY (SCAVENGER) UNIT

- For use with R134A and R1234YF
 - Meets SAE J2810 and J2851
 - Spark-proof
- Included:
- 30 lb. tank
 - Low side recovery hose
 - Couplers

TRSA30 Refrigerant Recovery (Scavenger) Unit



PORTABLE RECOVERY EQUIPMENT

- Two cylinder oilless reciprocating compressor
- Includes oil separator and moisture filter
- 115 V 50/60 Hz, 850 W
- Cleanable 100 mesh screen filter

TRA21 Includes 30 lb DOT recovery tank

TRSA21 Refrigerant Recovery (Scavenger) and Oil Separation Unit
Includes Dual Refrigerant Manifold



30 lb

REFRIGERANT RECOVERY TANKS

- Recover, reclaim, transport, recycle, and use for storage
- All cylinders meet DOT specifications DOT04BA-400 and DOT04BW-400
- Working pressures of 260-400 Psi
- Powder coated for maximum rust protection
- UL listed valves

CRX430T

CRX430TS With tank overfill sensor



PORTABLE CHARGING STATIONS

Everything you need to perform full system evacuation and charging in one compact, mobile unit.

- 4-Valve manifold R-134a
- Large 2.5" (68mm) gauges
- 6' Premium Hoses
- Couplers
- 220 lb scale
- 2 CFM, single stage, dual voltage vacuum pump

CS12DMV4TP6Q R-134a, R22, R404A

CS12DMV4SP6Q R-134a



A/C FLUSH GUN W/REGULATOR AND UNIVERSAL COUPLER AND BLOW GUN

Used for flushing components on or off the car.

- Simple to use with shop air. Just fill the cylinder with flush solution
- Works well on all condensers and evaporators
- Comes complete with cylinder, hose and flush gun

TLFGRA Regulator, universal coupler, cylinder, hose and flush gun

TLFG Cylinder, hose and flush gun



CPS® SUPREME FLUSH

Specially formulated with a proprietary chemistry to remove common system contaminants

AFMSF

CPS® A/C FLUSHING MACHINE

Simple 2-step operation with a single connection

- Powered by shop air
- Air purge
- Forward or reverse flush without changing hoses
- Easy to connect quick couplers fit evaporators, condensers and hose connections
- 8' clear braided hoses

AFM100



PRO-SET® R-134A, R-1234YF

- **Body Type:** 2-Valve anodized aluminum block body
- **Valve Type:** Triple Seal™ piston valves
- **Fittings:** 1/4" SAE
- **Gauges:** 3 1/8" silicon dampened; 1.0 accuracy
- **Hoses:** (3) 6'
- **Includes:** Two sets of manual couplers

MTHF0134

Replacement Parts and Accessories on pages 20-21



PRO-SET® R-12, R-134A

- **Body Type:** 2-Valve anodized aluminum block body
- **Valve Type:** Vortech® Deep Vacuum Valves
- **Fittings:** 1/4" SAE
- **Gauges:** 2 1/2" silicon dampened; 1.6 accuracy
- **Hoses:** (3) 6' with 45° ball valves on end
- **Includes :** R-134a couplers

MA1234

Replacement Parts and Accessories on pages 20-21



PRO-SET® R-134A

- **Body Type:** 2-Valve anodized aluminum block body
- **Valve Type:** Triple Seal™ piston valves
- **Fittings:** 1/2" ACME
- **Gauges:** 3 1/8" silicon dampened; 1.0 accuracy
- **Hoses:** (3) 6'
- **Includes:** Manual R-134a couplers

MT717A6Q

Replacement Parts and Accessories on pages 20-21



BLACKMAX® R-134A

- **Body Type:** 2-Valve black anodized aluminum block body
- **Valve Type:** Triple Seal™ piston valves
- **Fittings:** 1/4" SAE 45°
- **Gauges:** 2 1/2" silicon dampened; 1.6 accuracy
- **Hoses:** (3) 8'
- **Includes:** Manual couplers, protective gauge boots, hanging hook and tin carrying case

MAID8QZ

Replacement Parts and Accessories on pages 20-21



BLACKMAX® R-134A, R-1234YF

- **Body Type:** Black & Chrome Edition 2-Valve anodized aluminum block body
- **Fittings:** 1/2" ACME for both refrigerants
- **Gauges:** 2 1/2" silicone dampened
- **Hoses:** (3) 8'
- **Includes :** Manual couplers, protective gauge boots, hanging hook and tin carrying case

MAID8QDL

Replacement Parts and Accessories on pages 20-21



BLACKMAX® HFO (R-1234YF)

- **Body Type:** 2-Valve anodized aluminum block body
- **Gauges:** 2 1/2" silicone dampened
- **Hoses:** (3) 8'
- **Includes :** Manual couplers, protective gauge boots, hanging hook and tin carrying case

MAID8QYF

Replacement Parts and Accessories on pages 20-21

PRO-SET® VACUUM PUMPS

Pro-Set® vacuum pumps are your premium solution for obtaining the deepest ultimate vacuum and provide the greatest range of horsepower and free air displacement.

- Air cooled, thermally protected motors encased in a durable aluminum housing
- Large oil-fill port with proprietary, mist-free exhaust cap
- Easily accessible oil drain port
- Large oil sight glass
- Multiple SAE and ACME intake fittings with check valve
- On/Off power switch
- Rubber lined handle, skid resistant rubber feet



PREMIUM VACUUM PUMPS

- Includes gas ballast valve which speeds attainment of deep vacuum
- Two year warranty
- SAE 1/4", 3/8", 1/2" intake fittings
- For use with Class A1 (non-toxic, non-flammable) and A2 (non-toxic, flammable) refrigerants





COMPACT VACUUM PUMPS

- Features some of the smallest, lightest and most compact aluminum housings in the industry
- SAE: 1/4", ACME: 1/2" intake fittings
- One year warranty

PRO-SET® PREMIUM VACUUM PUMP OIL

Extremely high quality, severely hydro-treated vacuum pump oil compatible for use in pumps made by most manufacturers. It is strongly recommended that the vacuum pump oil be changed after each use to improve service and the life of the pump.

- VPOG6** 1 Gallon Bottles
- VPOQ12** 1 Quart Bottles
- VPOP12** 1 Pint Bottles

Model	Dual Stage				Single Stage	
	 VP6D	VPC2DU (Compact)	VP10D	VP12D	 VP6S	VPC4SU (Compact)
Stage	2	2	2	2	1	1
Ultimate Vacuum	10 Microns	15 Microns	25 Microns	25 Microns	50 Microns	100 Microns
Dimensions (Inches)	12.2" x 5" x 9.6"	11.3" x 4.5" x 8.0"	14.9" x 5.7" x 10.6"	14.9" x 5.7" x 10.6"	13.1" x 5.5" x 10"	11.3" x 4.5" x 8.0"
Weight	22.5 lb (10.2 kg)	12.1 lb (5.5 kg)	30.3 lb (13.7 kg)	30.9 lb (14.0 kg)	18.3 lb (8.3 kg)	11.0 lb (5 kg)
Free Air Displacement	6 CFM @ 60 Hz (144 l/m @ 50 Hz)	2 CFM @ 60Hz (48 l/m @ 50Hz)	10 CFM @ 60Hz (240 l/m @ 50Hz)	12 CFM @ 60Hz (288 l/m @ 50Hz)	6 CFM @ 60 Hz (144 l/m @ 50 Hz)	4 CFM @ 60 Hz (96 l/m @ 50 Hz)
Motor Size (HP), RPM @ 50/60Hz	1/2 HP (2880, 3440 RPM)	1/4 HP (2880, 3440 RPM)	3/4 HP (2880, 3440 RPM)	1 HP (2880, 3440 RPM)	1/2 HP (2880, 3440 RPM)	1/4 HP (2880, 3440 RPM)
Voltage	110-120V Or 220-240V @ 50/60Hz	115V @ 60 Hz	110-120V Or 220-240V @ 50/60Hz	110-120V Or 220-240V @ 50/60Hz	110-120V Or 220-240V @ 50/60Hz	115V @ 60 Hz
Power Cord Connection to Pump	Universal IEC Socket & Voltage Selector Switch	Hardwired, Nema 115V Plug	Universal IEC Socket & Voltage Selector Switch	Universal IEC Socket & Voltage Selector Switch	Universal IEC Socket, Voltage Selector Switch, Nema 15 Plug	Hardwired, Nema 115V Plug
Oil Capacity	16 oz (470 ml)	9 oz (250 ml)	28 oz (830 ml)	27 oz (800 ml)	19 oz (540 ml)	10 oz (300 ml)
Gas Ballast Valve	Yes	No	Yes	Yes	No	No

COMPUTE-A-CHARGE® WIRELESS REFRIGERANT CHARGING SCALE

- 220 lb (100 kg) capacity / 0.25 oz (5 g) resolution
- 8.75" platform
- For use with CPS Link™ app and Android or iOS mobile device
- Weigh, charge and recover refrigerants
- Comes with soft carrying case
- Battery operated

CC220W Wireless Scale
CCXSC Soft Carrying Case



Version 4.3 or higher

Google Play is a trademark of Google Inc. Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. All trademarks are owned by their respective companies.

CPS LINK™ APP

U.S. Patent No. 9,043,161

Easily input or access:

- Job data (name, client, invoice #)
- Client list (name, address, e-mail, phone)
- Tank Tracker™ tank and refrigerant management system
- Optional cloud storage
- Custom alarms for weight set-points
- E-mail customer and job information
- Operates in ISM band for international use

CPS® COMPUTE-A-CHARGE® CHARGING AND RECOVERY SCALES

- Unparalleled accuracy, precision and reliability
- Calibrated to strict NIST standards
- Ergonomic handheld remote controls with large, high contrast wide angle LCD displays
- Rugged cast aluminum platform and base assemblies for stability and long life
- Electronic and mechanical overload protected to withstand 150% of capacity
- Environmentally sealed and temperature compensated for reliable operation in extreme environments
- Automatic tare upon every start up and manual zero function
- Magnetic backing on handheld display for mounting to metal services or 360° swivel hanging hook
- Easy to read, fast response measurement on large LCD
- Visual and mechanical overload protection
- Durable protective transport case enables operation of scale in or out of enclosure



COMPUTE-A-CHARGE® PROGRAMMABLE HIGH CAPACITY SCALE

- 220 lb (100 kg) capacity / 0.25 oz (1g) resolution
- Programmable for automatic charging or recovery via integrated solenoid valve
- Accommodates 30, 50, 90 and 125 lb cylinders

CC800A



COMPUTE-A-CHARGE® SCALES

- Our most versatile units with best-in-class accuracy

CCD110 110 lb (100 kg) capacity/ 5 g resolution
CC220 220 lb (100 kg) capacity/ 10 g resolution

TWICE THE SENSOR AND BATTERY LIFE OF THE LEADING COMPETITOR

PRO-SET® REFRIGERANT LEAK DETECTOR WITH MINI UV LIGHT

- Software managed sensor rejuvenation mode initiated at start up ensures the highest level of sensitivity with every use, for up to 500 hours of detecting leaks of less than .1 oz per year
- Microprocessor controlled sensor electronics utilizing a multi channel signal detection method improves sensitivity while reducing false alarms
- Certified to meet SAE J2791 for R-134a, meets US and International standards for automotive use for SAE J2913 for HFO-1234yf, and Euro Standard EN 14624
- 50 hour battery life (3 "C" batteries) Auto Off after 10 minutes
- 2 year warranty excluding batteries and sensor
- Both visual and audible leak indicators
- Patent Pending

LDA1000UV With Mini Clip-On UV Light
LDA1000H Leak Detector only
 Replacement Parts and Accessories on pages 20-21



CLIP-ON UV LIGHT

Proprietary "Clip-On" chassis for attachment to electronic leak detectors, video borescopes and extension type devices that measure 1/4" to 3/8" in diameter.

UVMINI

Replacement Parts and Accessories on pages 20-21



LEAK-SEEKER® REFRIGERANT LEAK DETECTOR

A rugged, three position slide switch is used to turn the instrument on and select either LO or HI sensitivity ranges. Visual indication of the leak size is provided by a high intensity LED varying in brightness with the concentration of the refrigerant.

LS780C

Replacement Parts and Accessories on pages 20-21



LEAK-SEEKER® REFRIGERANT LEAK DETECTOR

Combines the most advanced electronic circuitry with Ion-pump® sensor technology creating a highly sensitive, accurate electronic refrigerant leak detector. Over 100 computer generated tones and a high intensity bar graph display quickly alerts the user to varying halogen concentrations. Patented, automatic calibration design eliminates the need for manual balance or tick rate adjustments.

LS790B

Replacement Parts and Accessories on pages 20-21

LEAK DETECTION POCKET MIRRORS

Spot those hard-to-find leaks and traces of refrigerant dye and oil in difficult areas by supplementing your detection with a telescoping mirror.

CIRCULAR TELESCOPING MIRROR

1 1/4" diameter
TLMIR1



CIRCULAR TELESCOPING MIRROR

2 1/4" diameter
TLMIR2



RECTANGULAR TELESCOPING MIRROR

3 1/2" x 2"
TLMIR3





NITROGEN PRESSURE LEAK TEST KIT

Easily pre-check systems for leaks due to loose mechanical connections, hose leaks, evaporators and condensers without using refrigerant and venting into the atmosphere.

NITROKIT includes: a high quality 1-valve manifold with a 0-200 PSIG 3-1/8" gauge, 6' (180cm) premium red 1/4" service hose, 15' yellow hose assembly with 1/4" MPT x 1/4" coupler and high side R134a and R-1234YF couplers.

NITROKIT
NITROKITG Includes nitrogen regulator



NITROGEN REGULATOR

- Enables pressure control of nitrogen tank for A/C pressure testing and transducer calibration

BRRN1



Built in LED Light



K-Type Input

INFRARED THERMOMETER WITH ADJUSTABLE EMISSIVITY AND LASER SIGHT

- High output laser sighting for visual reference to measurement area
- Integrated probe port for use with any wired K-type accessory probe
- Focused 12:1 distance to spot ratio for accuracy over extended distances
- User adjustable emissivity settings for accurate measurement of varied surface materials
- Unit displays Min/Max Average temperature readings
- Integrated LED worklight illuminates work area for safety
- Measurement display in °F or °C on a 4-digit back-lit LCD

TMINI12



DIGITAL POCKET THERMOMETER

Digital pocket thermometer with stainless steel probe and pocket clip. Range: -58° to 302°F / -50° to 150°C

TMDP



ANALOG POCKET THERMOMETER

5" (127 mm) analog pocket thermometer with 1" dial and stainless steel probe and pocket clip

TMAP Fahrenheit scale 0 - 220°F
TMAPC Celsius scale -10 to 100°C



VACUUM GAUGE W/DIGITAL LCD DISPLAY WIRELESS

- Large, 5-digit LCD display with low battery indicator
- Easy 2-button control (On/Off and Units)
- Select from four different vacuum units (at any time)
- Atmospheric to 0 micron pressure range
- Auto-Off after 10 minutes of no use
- Operates up to 20 continuous hours on one 9V alkaline battery (included)
- Compatible with all refrigerant gases (including ammonia)
- Field cleanable sensor
- Includes stainless steel T connector, hanger hook, vinyl storage case, and Quick Start Guide all packed in a clear clamshell

GREATER FUNCTIONALITY WHEN USED WITH CPS Link™ APP:

- Choose from eight different languages
- Log vacuum test data (viewable in real time graphs)
- Client Lists – Enter and retain client information
- Job Checklist – Create and retain job reminders
- Job Tracker – Create and retain record of services performed
- Geolocation – Record where (global coordinates) and when (time stamp) jobs performed
- Set low and high alarms
- Cloud backup of data

VG200W



VACUUM GAUGE WITH DIGITAL LCD DISPLAY

- Calibrated to strict NIST standards for best-in-class accuracy and reliability
- Advanced sensor design with self-heated thermistor bridge and automatic temperature compensation
- Field cleanable sensor designed to withstand 400 Psi of positive pressure
- Continual digital readout of evacuation process on large, easy to read 5-digit LCD display
- User selectable units: Microns, Torr, in/hg or mBar

VG200



16" RUBBER BOTTOM TOOL ORGANIZER
TLBAG2



SQUARE TOOL ORGANIZER
TLBAG1



BLACKMAX® PREMIUM HOSES

- Nylon permeation barrier (Meets SAE J2196)
- Leak-proof 8-sided crimp
- 800 Psi working pressure/ 4000 Psi burst pressure
- All-weather flexibility and strength
- Extra deep knurling on nuts for easy grip
- Adjustable valve core depressor
- Blow off grooves prevent spray back

HA8BKAZ 8' w/chrome fittings 1/2" x 1/2"

HA8BKZ 8' 14mm x 1/2"

Replacement Parts and Accessories on pages 20-21



1/4" SAE CHARGING HOSES

Size	Features	3Pack	Blue	Red	Yellow
3ft		HS3	HS3B	HS3R	HS3Y
	(ABB)	HS3A	HS3BA	HS3RA	HS3YA
	(BV)	HS3E	HS3BE	HS3RE	HS3YE
5ft		HS5		HS5R	HS5Y
	(ABB)	HS5A	HS5BA	HS5RA	HS5YA
	(BV)	HS5E	HS5BE	HS5RE	HS5YE
6ft		HS6	HS6B	HS6R	HS6Y
	(BV)	HS6E	HS6BE	HS6RE	HS6YE
	(IBV)	HS6L	HS6BL	HS6RL	HS6YL
8ft		HS8	HS8B	HS8R	HS8Y
	(BV)	HS8E		HS8RE	HS8YE
	(IBV)	HS8L	HS8BL	HS8RL	HS8YL

1/2" R-134A CHARGING HOSES

Size	Features	3Pack	Blue	Red	Yellow
3ft			HA3B	HA3R	HA3Y
	(ABB)	HA3A	HA3BA	HA3RA	HA3YA
5ft			HA5		HA5Y
	(ABB)	*call			HA5YA
6ft			HA6	HA6B	HA6R
	(ABB)	HA6A			HA6YA
8ft			HA8	HA8B	HA8R
					HA8Y

(ABB) = Anti-Blowback

(BV) = Ball Valve

(IBV) = Inline Ball Valve

R-134A



- R-134a premium manual coupler set
 - 14mm fittings
 - Six latching balls provide superior alignment
 - 14mm female thread
- QC134SET** Both
QCL134 Low Side
QCH134 High Side

R-134A



- R-134a snap coupler set
 - 14mm fittings
- QC13490SET** Both
QCL13490 Low Side
QCH13490 High Side

R-134A



- Manual coupler set with AD84L adapter fitting used to convert R-12 to HFO1234YF
 - 1/4"SAE male
 - Six latching balls provide superior alignment
- QC144SET** Both
QCL14 Low Side
QCH14 High Side

R-1234YF



- HFO1234YF manual coupler set
 - 12mm female
 - Six latching balls provide superior alignment
- QC1234SET** Both
QCL1234 Low Side
QCH1234 High Side

CONVERTS R-12 TO R-1234YF



- Manual coupler set with AD84L adapter fitting used to convert R-12 to HFO1234YF
 - 1/4"SAE male
 - Six latching balls provide superior alignment
- QC123414SET** Both
QCL123414 Low Side
QCH123414 High Side

CONVERTS R-134A TO R-1234YF



- Manual coupler set with AD88L adapter fitting used to convert R-134a to HFO1234YF
 - 14mm female
 - Six latching balls provide superior alignment
- QC1214SET** Both
QCL1214MM Low Side
QCH1214MM High Side



R-134A VALVE CORE REMOVER AND INSTALLER

- Fits high and low service with standard size valve cores
- Built-in ball valve retains charge and allows access to A/C system
- Excellent for replacing valve cores without discharging the system and for speedy recovery and recharging

TLVC134



R-12/R-134A VALVE CORE AND ORIFICE KIT

The TLK134 is the most complete tool kit on the market for valve core and orifice tube service. Includes an easy to find application chart.

TLK134



SPRINGLOCK TOOL KIT

- TL7238** (Includes all four)
- TL7239** 3/8" Fitting Springlock Tool (Red)
- TL7240** 1/2" Fitting Springlock Tool (Blue)
- TL7241** 5/8" Fitting Springlock Tool (Black)
- TL7242** 3/4" Fitting Springlock Tool (Beige)



REFRACTOMETER

Antifreeze / Battery / Cleaning Fluids Tester

This instrument is designed for testing the concentration of battery fluids, antifreeze liquids and cleaning fluids. The percentage indicator indicates the point of freezing for both propylene glycol and ethylene glycol. It can also be used for checking the strength of electrolyte solution in batteries.

TLREF




A/C ALUMINUM DISCONNECT TOOL KIT

Complete A/C and transmission line disconnect tool kit

- Features aluminum durable construction
- Sizes – 1/2", 3/8", 5/8", 3/4"
- For use with all vehicle makes and sizes

TL7881

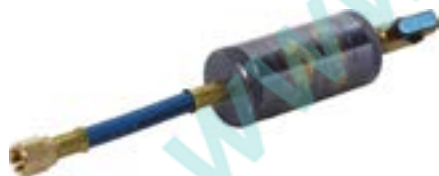

R-134A REFILLABLE EXPANDABLE SAE OIL DYE INJECTOR

SAE oil and dye injector is designed to be installed on the low side of the manifold. The injector has a 2-ounce capacity and 1/2" ACME threads for easy installation.

- TLJ4** Assembly as pictured above
- TLJX4H** Replacement Oil Injector Hose for TLJ4
- TLJXR** Oil Injector O-Ring R-12/R-134a

For use with UView A/C oil page 31



3-IN-1 SIDE CAN TAP VALVE

Can be used with both R-12, R-134a, and oil cans

- Has both 1/4" and 1/2" ACME tee fittings
- Permanently attached swiveling inserts
- Quick change between can sizes

- TLCT1234**
- TLCTXG** 10 Replacement Gaskets



AB AB12

HOSE FITTING ANTI-BLOWBACK

AB 1/4" SAE male x 1/4" SAE female

AB12 1/2" Male x 1/2" female ABB hose end fitting



HOSE FITTING BALL VALVE

BV12 1/2" ACME male x 1/2" ACME female straight ball valve

BVXH BV Handle with red, blue & yellow inserts



125 LB TANK FITTINGS

AD41 3/4"-14 x 1/4" SAE male

AD81 3/4" x 1/2" ACME male



AD84L AD88L

HFO TANK ADAPTERS

AD84L 1/4" SAE male x 1/2" ACME Left hand female

AD88L 1/2" ACME male x 1/2" ACME Left hand female



AD48 AD48L

ADAPTER FITTING

AD48 (3 pack) 1/4" SAE female x 1/2" ACME male adapter

AD48L (3 pack) 1/4" SAE female x 1/2" ACME left hand male



ADAPTER FITTING

14mm male x 1/4" SAE male

AD14



ADAPTER FITTING LOW SIDE R-134A

1/2" ACME F x Low-Side R-134a

AD12



ADAPTER FITTING

1/4" SAE male x 1/2" ACME F adapter

AD84



AVC134H AVC134L

R-134A SERVICE PORT CAPS

AVC134H High Side (10 pack)

AVC134L Low Side (10 pack)



VALVE CORES

AVS1 (10 pack)



4-WAY SAE VALVE CORE THREAD CHASER

1/4" and 3/16"

TLVC4

TLXVC (Rebuild kit for TLVC4)



POCKET VALVE CORE TOOL

Comes with four spare cores

TLVC1



DUAL VALVE CORE REMOVER AND INSTALLER

(1/4" SAE Valves and Auto R-134a Valves)

TLVC2



VALVE CORE REMOVER AND INSTALLER

R-134a 8/10mm

TLVC810














R-134A/R-12 90° FLEX HOSE ADAPTER KIT

ADK1234



R-12 TO R-134A CHARGE AND VACUUM ADAPTER KIT

ADK134








FX3030X1	FX Series Maintenance Kit - Includes Filter, Vacuum Pump Oil and Coupler O-Rings	
ARXF5	AR2788 / AR2788S filter for FA and FX series	
ARXF2	AR500/2700/2700M replacement filter	
ARXF	AR212TR/300/400 replacement filter core	
AR27XHB115	115V Heater blanket	
AR27XHB230	220V Heater blanket	
ARX134T	R-134a 1/2" ACME 50 lb recovery tank	
ARX134TS	R-134a 1/2" ACME 50 lb recovery tank w/float switch	
FA1234X1	50 lb tank kit for additional refrigerants	
AFMXC	3/8" SAE fitting w/2-step rubber cone	
AFMXCS	Flush universal clamp rubber seal 2-step (pack of 2)	
AFMXCSET	Flush universal clamp set 3/8" fitting (pack of 2)	
AFMXC4	Flush universal clamp 1/4" SAE fitting w/rubber cone	
AFMXCS2	Flush universal clamp small cone rubber seal (pack of 2)	
AR27XCK	AR2788 condenser accessory kit	
AR27XVGK	Vacuum gauge mounting kit for use w/VG100 or VG200	
ARXC	Nylon cover for AR series	
CRX400T	50 lb tank fits FA and FX series equipment	
CRXTOS3	CR overfill sensor cord kit 230V (all models)	

MANIFOLD AND GAUGES





MVXKC	BLACKMAX Series manifolds with Vortech valves Replacement valve handle (chrome/metal)	
MXPKC	BLACKMAX Replacement Valve Handle (Chrome)	
M2XHA	Pro-Set/ Vortech valve manifold bodies 2-way hose anchor bracket for	
M2XRK	Diaphragm valve repair kit: services two valves	
M4XRK	Diaphragm valve repair kit: services four valves	
M4XHA	4-Way hose anchor bracket for Vortech valve manifolds	
MTXK	Working Man Series manifolds replacement valve handle rubber over metal	
MV2XRK	Vortech valve repair kit: services two valves	
MVXK	Plastic replacement valve handle with color inserts for Vortech valves	
MXBK	CPS Brass Manifold Series Replacement Valve Handle	
MXC	Plastic Carrying Case for Manifolds	
MXMH	Chrome Hanging Hook for all Manifolds	
MXPK	Plastic Replacement Valve Handle for Triple Seal Valves	
MXPV	Triple Seal Complete Piston Valve Assembly	
MXPVO	Triple Seal piston valve seals only repair kit: services two valves	
RGCH	Gauge High R-12, 22, 502 2.5"/68mm, 1.6%, PSI/°F w/Metal Case	
RG15H	Gauge High R-134a Only, 2.5" / 68mm, 1.6%, PSI / kgcm2, °C / °F & Chrome Metal Case	
RG1H	Gauge High R-134a Only, 2.5"/68mm, 1.6%, PSI/kgcm2, °C/°F & Metal Case	
RG1HB	Gauge High R-134a Only, 2.5"/68mm, 1.6%, PSI/kgcm2, °C/°F & Metal Case & Boot	
RGSH	Gauge High R-134a Only, 3 1/8"/80mm, 1.6%, PSI/kgcm2, °C/°F & Metal Case	
RG15L	Gauge Low R-134a Only, 2.5"/68mm, 1.6%, PSI/kgcm2, °C/°F & Chrome Metal Case	
RGIL	Gauge Low R-134a Only, 2.5"/68mm, 1.6%, PSI/kgcm2, °C/°F & Metal Case	

RGILB	Gauge Low R-134a Only, 2.5"/68mm, 1.6%, PSI/kgcm ² , °C/°F & Metal Case & Boot	
RGSL	Gauge Low R-134a Only, 3 1/8"/80mm, 1.6%, PSI/kgcm ² , °C/°F & Metal Case	
RGX68BB	2.5" / 68mm Blue Protective Rubber Gauge Boot	
RGX80BB	3 1/8" / 80mm Blue Protective Rubber Gauge Boot	
RGX68RB	2.5" / 68mm Red Protective Rubber Gauge Boot	
RGX80RB	3 1/8" / 80mm Red Protective Rubber Gauge Boot	
RGX68L	2.5" / 68mm Gauge Lens	
RGX80L	3 1/8" / 80mm Gauge Lens	
QCXO	High and low side O-Rings for Premium Couplers QCH90/QCL90	
QCXR34	High and low side O-Rings for Premium Couplers QCH14/QCL14	





CHARGING HOSES

HX14R	R-134a 14MM Hose O-rings, Pack of 10	
HX38G	3/8" SAE Hose Gaskets, Pack of 10	
HX3G	3/16" Hose Gaskets, Pack of 10	
HXG	1/4" SAE Replacement Hose Gaskets B426, Pack of 10	
HXD	1/4" SAE Hose Core Depressor, Pack of 10	
HXGA	Replacement Gaskets for 1/4" SAE ABB Fittings, Pack of 6	
HXGB	1/4" SAE Replacement Hose Gaskets, Pack of 100	
HXTG	1/4" SAE Teflon Replacement Hose Gaskets, Pack of 10	
HXGD	1/4" SAE Hose Gaskets & Core Depressors, Pack of 6 ea.	
HXGD2	1/2" ACME, 5/16" (1/2"-20 UNF) Gaskets & Core Depressors, Pack of 6 ea.	
HXKIT	Charging Hose Maintenance Kit	

ELECTRONIC LEAK DETECTION

LS2XF	Replacement sensor filters for the LDA1000 (pack of 10)	
LS2XVF	Replacement vapor filter sensing tip for LDA1000H	
EMOS2	Replacement sensor for the LDA1000H	
LSXBC	Replacement battery cover for LS780A, LS780B, LS790A, LS790B	
LSXBMK	Maintenance kit for LS780B, LS790B; Includes: (2) LSXS & (1) LSXSF	
LSXC	Carrying case for LS780A, LS780B, LS790A & LS790B	
LSXC3	Plastic carrying case for LS3000 & LS3000B	
LSXE	Earphone for LS780A, LS780B, LS790A, LS790B	
LSXMK	Maintenance kit for LS780A, LS790A; Includes: (2) LSXS & (1) LSXVF	
LSXS	Ion-pump sensor for LS780A, LS780B, LS790A & LS790B	
LSXS3	Replacement CCD sensor for the LS3000 & LS3000B	
LSXSF	Selective filter housing for LS780B & LS790B	
LSXVF	Water vapor filter for LS780A & LS790A	

WORKLIGHTS

TLXWL132BAR	Replacement expandable bar for the TLWL132R	
TLXWL132CH110	110V wall charger for TLWL132R	
TLXWL132CH12	12V battery charger for TLWL132R	
TLXWL132CLIP	Light holding clips for TLWL132R	
98006351	Hook	
98006352	Handle, Tube, Hook & Cap for Freedom-Lite™ and iView	
98006353	Switch for all Freedom-Lites™ (Cradle)	
TLWL132R	Rechargeable underhood led worklight automotive	

VIEW



Visit us online at cpsproducts.com

BUILT BY TECHNICIANS- FOR TECHNICIANS.

- ✓ *Premium A/C dyes, oils, and sealants*
- ✓ *Industry-leading injection systems*
- ✓ *A/C leak detection and maintenance solutions*



SMALL ADDITIVE PACKAGE.

BIG DIFFERENCE. SAME DOSE.

**DO MORE WITH
YOUR DYE**

**CERTIFIED TO SAE
STANDARDS**



Check out our video
to learn more here!

DETECT • ENHANCE • EXTEND

Super-concentrated UV dye	Friction modifier	Anti-wear additive	Antioxidant												
<p>Detects leaks quickly, saving time and money. A/C ExtenDye is proven to fluoresce brighter than the competition. And there's no need to use more. Use the same quantity of A/C ExtenDye per application as our Universal A/C dye.</p>	<p>Increases lubricity (less friction) of the compressor oil, improving efficiency (friction coefficient) by over 50% and improving fuel economy.</p>	<p>Creates a film that prevents contact between metal parts; reducing friction and heat, thereby extending component life. Effectively quiets noisy compressors.</p>	<p>Stops the oxidation process, reduces acidity and prolongs oil life.</p>												
<p>Fluorescence A/C ExtenDye fluoresces brighter than the competition</p>	<p>Friction Coefficient</p> <table border="1"> <tr> <th>Oil Type</th> <th>Friction Coefficient</th> </tr> <tr> <td>OE Oil</td> <td>~0.11</td> </tr> <tr> <td>OE Oil & A/C ExtenDye™</td> <td>~0.05</td> </tr> </table>	Oil Type	Friction Coefficient	OE Oil	~0.11	OE Oil & A/C ExtenDye™	~0.05	<p>Wear Resistance (Falex Test)</p> <table border="1"> <tr> <th>Oil Type</th> <th>Wear Resistance (Falex Test)</th> </tr> <tr> <td>OE Oil</td> <td>~1200</td> </tr> <tr> <td>OE Oil & A/C ExtenDye™</td> <td>~2500</td> </tr> </table>	Oil Type	Wear Resistance (Falex Test)	OE Oil	~1200	OE Oil & A/C ExtenDye™	~2500	<p>When combined, we refer to this exciting new additive package as QuietCool™ Technology.</p>
Oil Type	Friction Coefficient														
OE Oil	~0.11														
OE Oil & A/C ExtenDye™	~0.05														
Oil Type	Wear Resistance (Falex Test)														
OE Oil	~1200														
OE Oil & A/C ExtenDye™	~2500														

LEAK DETECTION DYES

A/C EXTENDYE™ CERTIFIED TO SAE STANDARDS



A/C EXTENDYE™ CARTRIDGE

Works exclusively with the Spotgun™ injection system
499108A 8 oz Cartridge




A/C EXTENDYE™ CARTRIDGE

Works with the Spotgun Jr.™ and Eco-Twist injection system
399020A 1 oz Cartridge
399020AEU 1 oz Winged Cartridge
399006A 0.25 oz Cartridge
399006AEU 0.25 oz Winged Cartridge



A/C EXTENDYE™ BOTTLE

B499024A 1 oz Bottle
B499012A 0.25 oz Bottle

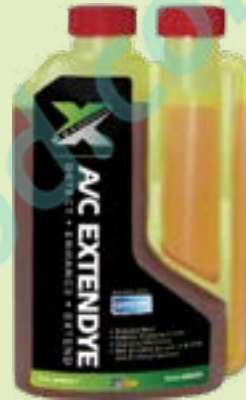

A/C EXTENDYE™ BOTTLE

Exclusive new bottle design with accurate dosing chamber
499008A 8 oz Bottle



NEW! CPS® VIVID UNIVERSAL A/C DYE

Provides excellent fluorescence and exceptional value!

- Highly fluorescent formula
- Co-solvent free chemistry
- Certified to meet SAE J2297 for use in R-134a and R-1234yf systems
- Compatible with hybrid vehicles

UVVD8 8.45 oz Bottle
477108 8 oz Cartridge



MULTI-PURPOSE DYE

- Pinpoint leaks in engine oil, transmission, hydraulic, power steering, gasoline, and diesel fuel systems
- Services eight vehicles

483208 8 oz Bottle
B483206 (6) 1 oz Bottle



RADIATOR COOLANT DYE

For use with regular (green) coolant

- Pinpoint leaks in cooling systems, including radiator, hoses, fittings, water pumps and head gaskets

483908 8 oz Bottle
B483906 (6) 1 oz Bottle

See more dyes on following page

LEAK DETECTION DYES

NOT ALL DYES ARE CREATED EQUAL...

All UView dyes are super concentrated and safe for A/C systems. All UView air conditioning dyes meet SAE J2297 Standard for R-134a PAG systems and the new R-1234yf systems with PAG oil and are Hybrid safe.

Part#	Description	Unit Size	Std Pack	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
A/C ExtenDye®													
499008A	A/C ExtenDye Bottle	8 oz	6	628604004486	3.75	1.75	6.00	0.62	16286044990106	10.50	4.20	6.50	4.03
B499024A	A/C ExtenDye Bottle	1 oz	6	628604005162	1.25	1.25	3.00	0.15	16286044990243	4.50	1.75	1.75	0.45
B499012A	A/C ExtenDye Bottle	0.25 oz	12	628604005148	1.00	1.00	1.75	0.10	16286044990120	4.50	2.75	3.00	0.12
499108A	A/C ExtenDye Cartridge	8 oz	6	628604004424	2.00	2.00	9.75	0.75	16286044991103	6.00	4.25	10.00	4.65
399020A	A/C ExtenDye Cartridges	4 x 1 oz	1	628604004448	4.75	1.75	4.75	0.45		NA			
399006A	A/C ExtenDye Cartridge	0.25 oz	6	628604005100	1.00	1.00	2.00	0.10	16286043990077	6.50	2.20	1.20	0.25
399020AEU	A/C ExtenDye Cartridges Winged	4 x 1 oz	1	628604004462	4.75	1.75	4.75	0.45		NA			
399006AEU	A/C ExtenDye Cartridge Winged	0.25 oz	6	628614005124	1.00	1.75	2.00	0.10	16286043990084	65.00	2.20	2.20	0.25
Universal A/C Dye													
UVIVD8	NEW! CPS Vivid A/C Dye	8.45 oz	6	628604006121	3.75	1.75	6.00	0.60	16286044990113	10.50	4.20	6.50	4.10
477108	NEW! CPS Vivid A/C Dye cartridge	8 oz	6	628604009085	2.00	2.00	9.75	0.75	16286044771088	6.00	4.25	10.00	4.65
499387	R-134a A/C Dye Capsules	6 x 0.06 oz	1	628604001829	4.75	3.25	1.75	0.30		N/A			
499005	Universal A/C Dye Cartridge	4 oz	6	628604001492	2.00	2.00	9.50	0.50	16286044990052	6.00	4.25	10.00	3.50
499009	Universal A/C Dye with eBOOST Bottle	8 oz	6	628604002383	3.75	1.75	6.00	0.60	16286044990090	10.50	4.20	6.50	4.10
499012	Universal A/C Dye Packets	12x.025oz	1	628604004448	4.50	2.75	1.75	0.12		N/A			
499109	Universal A/C Dye Cartridge with eBOOST	8 oz	6	628604003946	2.00	2.00	9.50	0.75	16286044991097	6.00	4.00	10.25	4.65
Multi-Purpose Dye													
B483206	Multi-Purpose Dye Bottles	6x1 oz	1	628604001638	4.50	2.75	3.00	0.60		N/A			
483208	Multi-Purpose Dye Bottle	8 oz	1	628604000488	3.50	1.75	6.00	0.55	16286044832086	10.50	4.20	6.50	4.10
483210	Multi-Purpose Dye for industrial use	1 gal	1	628604003106	5.50	5.50	12.00	7.30		N/A			
Coolant Dye													
B483906	Radiator Coolant Dye Bottles	6x1 oz	6	628604001621	4.50	2.75	3.00	0.70		N/A			
483908	Radiator Coolant Dye Bottle	8 oz	1	628604000518	3.50	1.75	6.00	0.55	16286044839085	10.50	4.20	6.50	4.10
Dye Cleaner													
481032	UV Dye Cleaner Spray bottle with nozzle	32 oz	6	628604001393	4.50	2.75	9.00	2.45	16286044810329	9.25	9.25	9.50	15.40

UVIEW Leak Detection Dyes

LEAK DETECTION KITS

1 YOUR CHOICE OF INJECTION SYSTEM.

- The original Spotgun™ is versatile and economical
- The Spotgun Jr. is perfect for controlling inventory through the use of single application cartridges

2 YOUR CHOICE OF CHEMISTRY DEPENDING ON YOUR NEEDS.

- A/C ExtenDye™ is formulated with super concentrated UV Dye, plus friction modifiers, anti wear additives and antioxidants
- Also available with Universal A/C Dye

3 YOUR CHOICE OF UV DETECTION LIGHT.

- Not all UV lights are created equal!
- 12V Mega-Lite™ and Micro-Lite™ provide strong, reliable power any time
 - UV Phazer™ BLACK™ offers extreme performance and outstanding versatility
 - LED-Lite™ offers an economical UV light
 - Pico-Lite™ offers excellent value



LEAK DETECTION KITS

Everything you need to find leaks — fast!

- All kits come with the industry's toughest and most durable UV enhancing glasses
 - Storage case
 - R-12 and R-134a adapters
- Replacement Parts and Accessories on pages 40-41

Part No.	Injection System	Application	UV Light	Qty/Size	UPC	Unit (inches & lbs)			
						Length	Width	Height	Weight
414500A	Spotgun	A/C ExtenDye	Micro-Lite	8 oz / 240 mL	628604004585	17.00	13	5	6.55
414565A			UV Phazer BLACK (Rechargeable)	8 oz / 240 mL	628604004608	17.00	13	5	6.10
332005A	Spotgun Jr.	A/C ExtenDye	UV Phazer Black (AAA Battery)	4 x 1 oz / 30mL	628604004561	14.00	11	4	3.6
332010A			LED Lite	1 oz / 30mL	628604005247	14.00	11	4	3.6
332220A			Pico-Lite	2 x 1 oz / 30mL	628604005261	14.00	11	4	3.6

Leak+Guard™

- SAFELY AND PERMANENTLY SEALS LEAKS
- CONTAINS SUPERIOR A/C DYE
- THE FIRST SEALANT CERTIFIED TO MEET SAE J2670
- COMPATIBLE WITH R-134A AND R-1234YF SYSTEMS

**YOUR
BEST
LINE OF
DEFENSE**




A/C SEALANT

THE SEALANT THAT WORKS EXCLUSIVELY WITH THE BEST INJECTION METHOD—THE SPOTGUN!

LEAKGUARD™ PROFESSIONAL A/C STOP LEAK

- LeakGuard is the first A/C stop leak to be certified to meet the SAE J2670 Standard
- LeakGuard is specifically formulated for slow leaks (up to 0.5mm/0.02") that can occur over a 6–12 month period
- LeakGuard is endorsed by one of the largest U.S. service providers and used in every A/C service
- Used as a preventive maintenance, LeakGuard will stay in the system as a high quality lubricant until such time that a leak occurs
- Safely seals leaks in both rubber and metal components
- LeakGuard is an oil based sealant that does not react to moisture and will not harden, crystallize or clog the A/C system
- Safe for use in all systems, and all recovery equipment
- Contains super concentrated UV dye to diagnose leaks and stop them

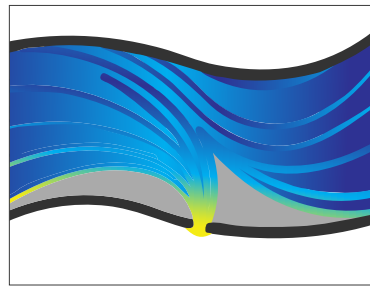

LeakGuard™ (illustrated as yellow) seeks out even the smallest leaks and forms a permanent mechanical seal.



LEAKGUARD™ 1 OZ CARTRIDGE

Works exclusively with the Spotgun Jr.™ injection system
480301



LEAKGUARD™ 8 OZ CARTRIDGE

Works exclusively with the Spotgun™ injection system
480308


Part#	Description	Unit Size	Std Pack	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
LeakGuard™													
480308	LeakGuard Cartridge	8 oz	6	628604004424	2.00	2.00	9.75	0.75	16286044803086	6.00	4.25	10.00	4.65
480300	LeakGuard Injection Kit - Spotgun Jr.	2 x 1 oz 1 x .25 oz	1	628604004523	13.75	8.25	2.13	1.50		N/A			
480301	LeakGuard Cartridge	1 oz	4	628604001577	1.00	1.00	4.00	0.15	16286044803017	4.75	1.50	4.75	0.40
480301EU	LeakGuard Cartridge Winged	1 oz	4	628604001003	1.00	1.00	4.00	0.15	N/A	4.75	1.50	4.75	0.40
480310EU	LeakGuard Injection Kit - ECO-Twist	1 oz	1	628604003564	6.75	4.00	1.50	0.40		N/A			
A/C Sealants													
480000	A/C Stop Leak Plus with UV Dye	4 oz	6	628604001904	3.25	2.75	5.25	0.50	16286044800009	8.75	7.00	6.00	3.10
480200	A/C Treatment Cartridge with UV Dye	1 oz	12	628604004066	1.00	1.00	4.00	0.10	16286044802003	7.75	4.50	2.20	1.30

Leak+GuardTM OneShot

With **AVC EXTENDYETM**

THE ONE SUPPLEMENT YOU NEED.

- QUICKLY AND EFFECTIVELY STOPS LEAKS
- DETECTS LEAKS WITH PREMIUM UV DYE
- ENHANCES A/C SYSTEM PERFORMANCE AND PROLONGS LIFE
- WILL NOT HARM A/C SYSTEM OR RECOVERY EQUIPMENT

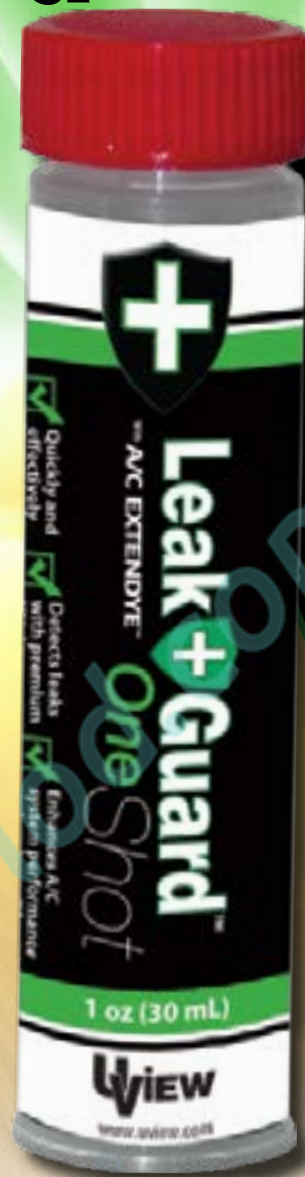

INCLUDES:

LeakGuard TM Technology	A/C ExtenDye TM	Friction Modifier	Anti-wear Additive	Antioxidant
Effectively finds and permanently stops small leaks as they form. Does not harden or crystallize.	Fluoresces leaks brighter than the competition.	Increases lubricity (less friction) of the compressor oil, improving efficiency (friction coefficient) by over 50% and improving fuel economy.	Creates a film that reduces contact between metal parts; reducing friction and heat, thereby extending component life. Effectively quiets noisy compressors.	Stops the oxidation process, reduces acidity and prolongs oil life.

Part#	Description	Unit Size	Std Pack	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
480500	LeakGuard OneShot Can	3.25 oz	12	628604008743	2.07	2.07	4.75	0.34	16286044805004	9	6.75	6.125	4.41
480501	LeakGuard OneShot Cartridge	1 oz	4	628604015482	1.00	1.00	4.00	0.15	16286044805011	1.75	4.75	4.75	0.45

EMERGING TECHNOLOGIES

UView is prepared for the future of mobile air conditioning.

A/C OIL

With all the changes, choosing the right AC oil has become confusing. UView offers a broad selection of A/C Oil.

For those who choose to use the OEM specified oil, we have it. And for those who desire simplicity and convenience, we have that too—a truly universal A/C oil. UView **488046YF** (8oz/240ml Cartridge) and **399046YF** (1oz/30ml Cartridge) oils are formulated to work as service oil for all R1234YF, R134a and Hybrid applications. **That's right—hybrid safe and OEM approved.**

As a reminder, installing oil using a sealed cartridge injection system assures the cleanest and driest oil reaches the AC system in exactly the correct dosage.



Spotgun™

- The most popular and professional injection method. Pull the trigger to inject a precise amount of dye and you're done! No mess, no waste.
- The most economical system per service
- Accurate dye delivery controls costs
- Our most popular oil injection kits: **480500** for R134a and **480500YF** for universal (see page 33)



Spotgun Jr.™

"Single-Shot" System

- Professional injection system for those that need to manage their inventory
- Smaller dosage, as low as one cartridge per vehicle
- Our most popular oil injection kits: **381450** for R134a and **381450** for universal (see page 33)



ECO-Twist™

Outstanding Value

- Economical injection system
- Perfect for advanced DIY users or low volume shops

Part#	Description	Unit Size	Std Pack	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
Spotgun A/C Oil Cartridges													
488046YF*	PAG 46 1234yf	8 oz	6	628604004967	1.75	1.75	9.75	0.70	16286044880490	6.00	4.25	10.00	4.40
4880460E	Double-End-Capped Universal PAG	8 oz	6	628604003403	1.75	1.75	9.75	0.70	16286044880490	6.00	4.25	10.00	4.40
488046P	PAG 46	8 oz	6	628604000877	1.75	1.75	9.75	0.70	16286044880469	6.00	4.25	10.00	4.40
488100P	PAG 100	8 oz	6	628604000884	1.75	1.75	9.75	0.70	16286044881008	6.00	4.25	10.00	4.40
488108E	ESTER 100	8 oz	6	628604000587	1.75	1.75	9.75	0.70	16286044881084	6.00	4.25	10.00	4.50
488125P	PAG 125 Meets GM spec. #9985752	8 oz	6	628604000891	1.75	1.75	9.75	0.70	16286044881251	6.00	4.25	10.00	4.50
488150P	PAG 150 Oil Cartridge	8 oz	6	628604000907	1.75	1.75	9.75	0.70	16286044881503	6.00	4.25	10.00	4.50
488104H	Hybrid Ester	4 oz	6	628604003427	4.75	2.00	11.00	0.45	16286044881046	12.00	4.25	12.50	3.35
NEW! Spotgun Jr. A/C Oil Cartridges													
399046	Universal PAG 46 Oil	1 oz	12	628604001300	1.00	1.00	2.00	0.10	10628604399046	7.75	4.50	2.00	1.2
399046YF*	PAG 46 1234yf	1 oz	4	628604009023	1.00	1.00	2.00	0.10	16286043990473	6.50	2.20	1.20	0.4
399100	PAG 100	1 oz	12	628604008422	1.00	1.00	2.00	0.10	16286043991005	7.75	4.50	2.00	1.2
399150	PAG 150	1 oz	4	628604008446	1.00	1.00	2.00	0.10	16286043991500	6.50	2.20	1.20	0.4
321410H	Hybrid Kit Refill	1 oz.	6	628604003946	6.5	4.5	1	0.15	16286043214104	7	4.5	6	1.2

*Also compatible with R134a systems.

A/C OIL



NEW! UVIEW PAG A/C OIL

- Available with or without A/C ExtenDye™ for fast leak detection
- A/C ExtenDye™ includes enhanced additive package to reduce wear, extend component life and improve efficiency of the A/C system
- Available in standard pack of 12
- 46 and 100 viscosities available

Part#	Description	Unit Size	Std Pack	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
A/C Oil Bottles													
488046PB	PAG 46 Oil Bottle	8 oz	12	628604004844	1.91	1.91	6.60	0.63	16286044880476	8.25	6.50	7.75	8.00
488046PBD	PAG 46 Oil Bottle with A/C ExtenDye	8 oz	12	628604004868	1.91	1.91	6.60	0.63	16286044880483	8.25	6.50	7.75	8.00
488100PB	PAG 100 Oil Bottle	8 oz	12	628604004882	1.91	1.91	6.60	0.63	16286044881015	8.25	6.50	7.75	8.00
488100PBD	PAG 100 Oil Bottle with A/C ExtenDye	8 oz	12	628604004905	1.91	1.91	6.60	0.63	16286044881022	8.25	6.50	7.75	8.00
488016E	Universal Ester Oil with Dye and eBOOST	16 oz	12	628604003700	2.25	2.25	8.25	1.25	16286044880162	7.75	10.00	9.00	15.30
488016P	Universal PAG Oil with Dye and eBOOST	16 oz	12	628604003724	2.25	2.25	8.25	1.25	16286044880168	7.75	10.00	9.00	15.30
499019	eBOOST with A/C dye and Universal Oil Bottle	1 oz	6	628604003625	1.00	1.00	3.00	0.10	16286044990199	4.50	3.25	2.80	0.65

A/C INJECTION KITS

A/C OIL | A/C EXTENDYE | LEAKGUARD

- ✓ **No Contamination**
- ✓ **Precise Injection**
- ✓ **No Waste**



SAE standards for A/C equipment in North America prohibit the use of onboard oil injection, (meaning oil must be added separately). This is the easiest and most efficient way to add A/C oil separately.

1 YOUR CHOICE OF INJECTION SYSTEM

- The original Spotgun™ is versatile and economical
- The Spotgun Jr. is perfect for controlling inventory through the use of single application cartridges
- The ECO-Twist™ system is the perfect entry-level injection tool

2 YOUR CHOICE OF CHEMISTRY

A/C Extender™ is formulated with super concentrated UV dye, plus friction modifiers, anti wear additives and antioxidants

- Also available with Universal A/C Dye
- A/C Oil is a perfect companion to SAE A/C recovery units
- LeakGuard™ is formulated to safely and permanently stop small leaks



HFO

Part No.	Injection System	Application	Refrigerant	Qty/Size	UPC	Unit (inches & lbs)			
						Length	Width	Height	Weight
471500A	Spotgun	A/C Extender	R-134a, R-12	8 oz / 240 mL	628604004523	13.75	8.25	2.13	2.86
481500		PAG 46 A/C Oil	R-134a, R-12	8 oz / 240 mL	628604005940	13.75	8.25	2.13	2.86
481500YF*		PAG 46 HFO A/C Oil	R-1234yf	8 oz / 240 mL	628604005964	13.75	8.25	2.13	2.86
NEW! 471500YF*		A/C Extender	R-1234yf	8 oz / 240 mL	628604026761	13.75	8.25	2.13	3.1
331500A	Spotgun Jr.	A/C Extender	R-134a, R-12	4 x 1 oz / 30mL	628604005223	13.75	8.25	2.13	1.70
330500A		A/C Extender	R-134a, R-12	4 x 0.25 oz / 7.5mL	628604005209	13.75	8.25	2.13	1.50
NEW! 381400*		PAG 46 A/C Oil	R-1234yf	8 x 1 oz	628604008705	13.75	8.25	2.13	2.5
NEW! 381450		PAG 46 & PAG 46 HFO A/C Oil	R-134a, R-12, R-1234yf	4 x 1 oz 4 x 1 oz	628604008729	13.75	8.25	2.13	3
NEW! 330500YF*		A/C Extender	R-1234yf	6 x 1 oz / 30mL	628604026785	13.75	8.25	2.13	2.2
480300	ECO-Twist	LeakGuard	R-134a, R-12	2 x 1 oz / 30mL	628604004523	13.75	8.25	2.13	1.70
321500A		A/C Extender	R-134a, R-12	4 x 1 oz / 30mL	628604005186	2.50	6.50	9.25	0.85
480310EU		LeakGuard	R-134a, R-12	1 oz / 30mL	628604003564	6.75	4.00	1.50	0.40
321400H	Hybrid Oil Cartridge	LeakGuard	R-134a, R-12	1 oz / 30mL	628604003885	2.50	6.50	9.25	0.85
		A/C Extender	R-134a, R-12	1 oz / 30mL	628604003885	2.50	6.50	9.25	0.85

*Also compatible with R134a systems.


Call and speak to a specialist. | Toll Free: 1-800-277-3808 | Customers outside the USA or Canada: +1 305-687-4121

VIEW




A/C Injection Kits


NOT ALL UV LIGHTS ARE CREATED EQUAL

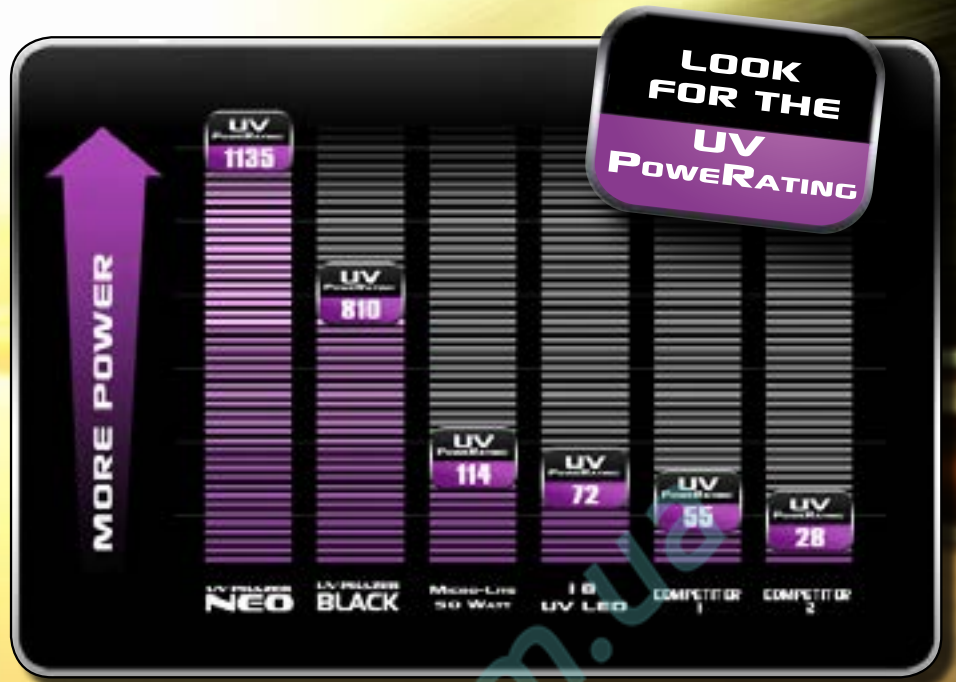A/C systems are getting smaller, and leaks are harder to find. UView helps you find more leaks faster, saving you money!



What the lumens index does for visible lighting, the UV PowerRating™ Index does for the UV spectrum by quantifying light output that most effectively fluoresces UV dyes.

- 
High Output True UV LED™ UV light fluoresces dyes brighter and provides more contrast than blue LEDs, making leaks easier to find and reduces inspection time.
- 
Constant power output ensures the light produces peak output, regardless of battery charge.
- 
Adjustable Lens Focus allows for focusing light intensity

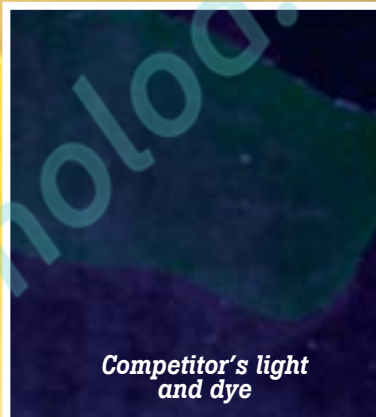

ACTUAL PHOTOS (images have NOT been enhanced.)

UV DETECTION LIGHTS								
Part No.	Description	Battery	Run Time (minutes)	UPC	Unit (inches & lbs)			
					Length	Width	Height	Weight
413025	UV Phazer NEO	Rechargeable Lithium-ion	90	628604003908	10.75	4.25	3.25	0.75
413065	UV Phazer BLACK	Rechargeable Lithium-ion	120	628604004004	10.75	4.50	3.25	0.75
413075	UV Phazer BLACK	3 x AAA alkaline	120	628604004028	10.75	4.50	3.25	0.75
413000	Micro-Lite 12V/50W (w/storage case)	12V (Vehicle)	NA	628604000068	12.50	9.25	3.75	2.40
413001	Micro-Lite 12V/50W	12V (Vehicle)	NA	628604000075	9.00	9.25	5.50	1.45
415000	Mega-Lite 2V/100W (w/storage case)	12V (Vehicle)	NA	628604001423	14	11	4	2.8
415001	Mega-Lite 2V/100W	12V (Vehicle)	NA	628604001447	9.00	9	6	2
413010	LED-Lite (6 LEDs)	3 X AA alkaline	60	628604002581	7.75	4.50	2.00	0.50
413020	Pico-Lite	3 X AA alkaline	60	628604002604	7.75	4.50	2.00	0.50



Powered by
LI-ION
Technology





UV PHAZER™ NEO™ UV LEAK DETECTION LIGHT

NEO™ finds leaks that others miss.

- High Output UV LED
- True UV: Fluoresces dyes brighter than blue LED lights
- Maintains steady power output throughout charge
- Adjustable lens focus allows focusing light intensity
- Rechargeable Lithium Ion battery: Years of trouble free battery life
- Compact design, perfect for use in tight areas
- Durable aluminum construction

413025

Replacement Parts and Accessories on pages 40-41

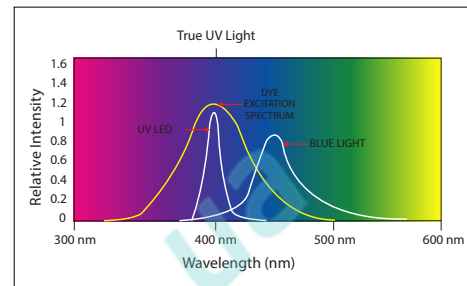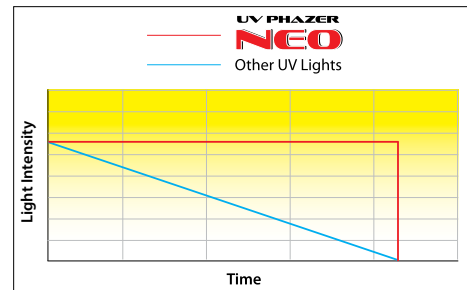

Powered by
LI-ION
Technology



UV PHAZER™ BLACK UV LEAK DETECTION LIGHT

Extreme Performance. Outstanding Value.

- Powerful, true UV LED illuminates up to 11X brighter
- 400nm wavelength fluoresces dyes brighter
- Provides more contrast than blue light, making leaks easier to identify
- Adjustable lens allows quick scans for larger leaks, or a concentration of light for hard-to-find, smaller leaks
- Compact housing allows for access into tight spaces
- Rugged aluminum construction stands up to years of heavy use

413065 (Rechargeable Li-Ion) pictured above

413075 (AAA Batteries) pictured at right

Replacement Parts and Accessories on pages 40-41



The rechargeable version 413065 features a Lithium Ion battery, good for two hours of output, charge after charge. An all new charging port eliminates the need to remove the battery for charging. A smart charger protects the battery from overcharging and extends battery life, for years of trouble free use. The AAA version 413075 is cost effective yet powerful, with two hours of output.



MICRO-LITE™ 50-WATT INSPECTION LIGHT

Compact and Powerful.

- The most popular 50-watt light. 70-degree angled head allows access into tight areas making leak detection easier
- Includes UV enhancing glasses

413001

413000 (w/storage case)

Replacement Parts and Accessories on pages 40-41



LED-LITE™ (SIX LED)

Professional compact leak detection light with six LEDs to illuminate all UV leak detection dyes.

- Includes UV enhancing glasses
- 3 AA batteries included

413010

Replacement Parts and Accessories on pages 40-41



PICO-LITE™

Professional compact leak detection light delivers big performance.

- Utilizing a 1-Watt Luxeon®, the latest in high intensity LED technology
- Compatible with all UV leak detection dyes
- Includes UV enhancing glasses
- 3 AA batteries included

413020

Replacement Parts and Accessories on pages 40-41

GIVE YOUR CAR THE FLU SHOT



Treat mold, mildew and bacteria



MiST™ nano-droplets get directly to the source of the problem



Safe, simple and effective profit generator that targets the health of the driver and occupants, not the vehicle

Start offering every one of your customers this inexpensive treatment...for their health!




**Removes
Mold**



**Removes
Flu Bug**



**Removes
Pollen**



**Removes
Bacteria**



MIST™ VENT SAMPLES BEFORE & AFTER



AWARD-WINNING COMPLETE IN-CAR SERVICE

MiST™ penetrates the entire ventilation system and passenger compartment surfaces to restore interior air quality. Mist is a safe, simple and effective service that targets the health of the driver. MiST is the perfect preventive maintenance (PM) service because it can be run on any vehicle, leased or owned that comes into your shop, regardless of year, make, model or mileage.



MiST™ Ultrasonic Cleaning Unit

- Portable 12V DC ultrasonic machine
- Nano-droplet delivery system of a specially formulated cleaning solution
- Fast service time
- Unattended operation
- Automatic shut-off upon completion

590160

Replacement Parts and Accessories on pages 40-41



MiST™ Starter Pack

Includes:

- Mist Ultrasonic Cleaning Unit
- (2) Cases of 12 MiST Ultrasonic Cleaning Solution

590160P

Replacement Parts and Accessories on pages 40-41



Battery Extension Cord

- 12 ft with accessory outlet
- Connects directly to vehicle battery
- For use when cigarette lighter does not work

590155

Replacement Parts and Accessories on pages 40-41



MiST™ Cleaning Solution

- MiST service for vehicle interiors and ventilation system
- Designed for exclusive use with MiST Ultrasonic unit (Single application)

590250



MiST™ Auto Remarketing

- Specially designed for used cars to treat mold, mildew and bacteria in the HVAC System and cabin of a vehicle
- Designed for exclusive use with MiST Ultrasonic unit (Single application)

590260



MiST™ Vent Air Fresheners

- Clip-on vent. Fragrance leaves vehicle smelling clean and fresh

590235

Summer Breeze

590236

Spicy Apple

590237

Citrus

590238

Vanilla

590239

Clean Car

Part#	Description	Std Pack	Unit Size	UPC	Unit (inches & lbs)				ITF-14 Master Carton	Case (inches & lbs)			
					Length	Width	Height	Weight		Length	Width	Height	Weight
590160	MiST II Ultrasonic Cleaning Unit	1	NA	628604003182	16.00	8.25	10.50	5.80	NA				
590250	MiST Cleaning Solution	12	3.38 oz	628604002925	2.00	2.00	4.75	0.30	16286045902504	13.00	4.75	5.00	4.15
590260	MiST Auto Remarketing Formula	12	3.38 oz	628604006107	2.00	2.00	4.75	0.30	16286045902603	13.00	4.75	5.00	4.15
590235	Vent Clip: Summer Breeze Air Freshener	12	NA	628604002840				NA		6.00	4.00	0.50	0.05
590236	Vent Clip: Spicy Apple Air Freshener	12	NA	628604002864				NA		6.00	4.00	0.50	0.05
590237	Vent Clip: Citrus Air Freshener	12	NA	628604002888				NA		6.00	4.00	0.50	0.05
590238	Vent Clip: Vanilla Air Freshener	12	NA	628604002901				NA		6.00	4.00	0.50	0.05
590239	Vent Clip: Clean Car Air Freshener	12	NA	628604003342				NA		6.00	4.00	0.50	0.05
590155	12V Battery Extension Cord with accessory outlet (12ft)	1	NA	628604002826					NA				

OEM
APPROVED



AIRLIFT™ KIT

Eliminate airlocks in vehicle cooling systems and refills in seconds. OEM approved worldwide!

- Refills the entire cooling system including the heater core!
- Eliminates time consuming bleeding and purging
- Checks for leaks while under vacuum
- Works on: cars, trucks, off road vehicles
- Suitable for battery cooling systems in electric and hybrid vehicles

550000

Replacement Parts and Accessories on pages 40-41



AIRLIFT™ II

An inexpensive solution to today's complex problem of airlocks in vehicle cooling systems.

- Refills entire cooling system in seconds, including the heater core!
- Eliminates time consuming bleeding and purging
- Checks for leaks while under vacuum
- Push button valve eliminates the need to change hoses
- Works on all cooling systems with "Fits-All" cone adapter

550500

Replacement Parts and Accessories on pages 40-41

OEM
APPROVED



AIRLIFT™ II HD

- Built to remove airlocks in the HD cooling system.
- Eliminates the time consuming process of refilling and bleeding cooling systems by creating a vacuum that refills the entire system in seconds, including the heater core, EGR coolers, intercoolers, and aftercoolers
- Equipped with a 90 degree angled gauge to accommodate tight fit applications and also checks for leaks while under vacuum
- Includes a cone adapter to fit most systems with an extra-long 8' hose for hard-to-reach areas
- OEM Approved by International Truck

550500HD

Replacement Parts and Accessories on pages 40-41



COMBUSTION LEAK TESTER

- Dual-chamber design for higher accuracy to eliminate false readings
- First chamber filters out alkaline particles that could result in a false indication of a combustion leak
- Test results in the second chamber provide a true indication of a combustion leak
- Works on gasoline, diesel and natural gas engines

560000



COMBUSTION LEAK TESTER FLUID

- For Combustion Leak Tester #560000 (uses +/- 2 oz of fluid per service)
- Positive proof a leak is present:
If tester fluid changes from blue to yellow in gasoline or natural gas engines
If tester fluid changes from blue to green in diesel engines

560500



RADIATOR TEST KIT

Unit comes complete with adapters, pressure test pump, thermometer and case.

- Has all adapters necessary to work with virtually 99% of all vehicles on the road domestic and foreign
- Full set of adapters for heavy and light duty trucks
- Color-coded adapters

TLRAD (Adapters are color coded anodized aluminum)
TLRADN (Adapters are color coded durable nylon)



THE VACUFILL IS A PROVEN ENGINE TOOL THAT REMOVES AND REFILLS COOLANT SYSTEMS AND PERFORMS A BUILT-IN LEAK TEST IN LESS TIME THAN TODAY'S CONVENTIONAL METHODS.

- **Connects easily to all engine cooling systems.** Simply connect to radiator opening or reservoir tank. No need to cut heater hoses or disconnect upper radiator hoses
- **Test for leaks.** Confirms system integrity, reduces chance of refilling a leaky system
- **Eliminates potential airlock problems.** Refill cooling system using "Patented" vacuum technology. (Refills like OEM's) Eliminates the need for burping and warm up
- **Refills in seconds.** Quickly refill from used or new coolant reservoir. Accurately pre-mix a 50/50 mixture of coolant in three gallon holding reservoir
- Safely store used coolant in large, 12 gallon holding reservoir
- No electrical or moving parts
- Operates completely on shop air
- Easy to operate
- Ideal for use with coolant flush chemicals

VACUFILL™

- Connects easily to all engine cooling systems
- Available with auxiliary pump for emptying the waste coolant reservoir
- Tests for leaks while under vacuum
- Refills the entire system in seconds while eliminating airlocks
- Large three gallon new-coolant fill tank
- Large 12 gallon waste-coolant reservoir

570000 Vacufill™

570000X Vacufill™ with Waste Pump

Replacement Parts and Accessories on pages 40-41











WASTE PUMP













Replacement Parts & Accessories



UV LEAK DETECTION

98006433	UV Phazer NEO lamp	
98027045	3.7V Lithium Ion battery	
98027303	Lithium Ion charger 3.7V with port (110V)	
98027304	Lithium Ion charger 3.7V with port (220V-EU)	
98006475	UV Phazer BLACK lamp (AAA)	
98006465	UV Phazer BLACK lamp (Rechargeable)	
98027240	MicroLED-Lite battery charger (120V)	
461102	110V/100 Watt Replacement Bulb Mega-Lite™	
461201	12V/100 Watt Replacement Bulb Mega-Lite™	
461107	Replacement Lens Mega-Lite™	
461111	Replacement Lens Micro-Lite™	
98007540	Rubber Retaining Lens Ring Mega-Lite™	
98007560	Rubber Retaining Lens Ring Micro-Lite™	
461105	12V/50 Watt Replacement Bulb Micro-Lite™, Econo-Lite™	
471112	UV Enhancing Glasses Econo-Lite™	

COOLING SYSTEM TOOLS (AIRLIFT, AIRLIFT II)

550510	Venturi Assembly (Airlift™)	
550530	Fill Hose Assembly (Airlift™)	
550535	(4) Rubber Stoppers (Airlift™)	
550537	Universal Cone Adapter (Airlift™)	
98037000	Vacuum Gauge (Airlift™)	
98037025	Vacuum Gauge (1.5") (Airlift™ II)	
98037030	Ball Valve (Airlift™)	
98037060	Quick Connector/Coupler (Airlift™)	
98037070	Coupler Seal (Airlift™)	
98038015	Fill Hose Assembly (Airlift™ II)	
98037090	Airlift Quick Connect Coupler male	
98037390	Airlift II Rubber Cone adapter plus HD	
98037321	Squeeze Bulb	
98037328	Tester	
550535	Rubber adapters (4 sizes)	
550537	Universal Cone adapter	
570150	Rad Neck adapter	
98037360	Rad Neck Rubber Stopper	
98063000	Fill Tank Cover (30"/ 76.2cm)	
98063100	Extraction Hose Assembly	
98063150	Fill Tank Filter	
98063300	8" Fill Tank Tube	
98063450	O-ring - Fill Tank 7.841" OD X 0.177" th	
98063451	O-ring - Fill Tank 7.880" OD X 0.197" th	
98064600	Drain Valve	
98064750	Base Plate	
98064950	4" Wheel Assembly (each)	
98066850	Vacuum Gauge 2.5"	
98071200	Ring Stopper (each)	

COMBUSTION LEAK TESTER

98037321	Squeeze Bulb	
98037328	Tester	

VACUFILL COOLANT EXCHANGER

550537	Universal Cone Adapter	
98037360	Rad Neck Rubber Stopper	
98063000	Fill Tank Cover	
98063100	Extraction Hose Assembly	
98063150	Fill Tank Filter	
98063300	20 cm Fill Tank Tube	
98063450	O-Ring: Refill Tank	
98064650	Drain Valve	
98064750	Base Plate	
98064950	1/4" Wheel Assembly	
98066850	Vacuum Gauge 64 mm	
98067750	Extension Tube Assembly	
98071200	Ringer Stopper	
98063310	O-Ring Repair Kit	
98063320	Fill Tank and O-Rings	



UV LEAK DETECTION AND A/C DYE KITS (Spotgun, Spotgun Jr. & ECO-Twist)

471112	UV Enhancing Glasses	
471535	R-134a Hose/Coupler: Twister & Spotgun™ Systems	
471536	High Side Adapter: R-134a	
471546	Spotgun™ Jr. R-134a Hose/ Coupler	
981470	R-12 Adapter Aluminum	
982564	Service Stickers: Strip of 32	
471111	Spotgun™ Injection Gun Kit	
471539	Spotgun™ Injection Gun	
98000010	Spotgun™ Jr. Injection Gun	
98007111	Spotgun™ Hanger Bracket	
98011025	Spotgun™ Jr. Hose High-Side	
471540	1234yf Spotgun Hose Assembly	
471547	1234yf Spotgun Jr. Hose Assembly	

LEAK GUARD

98010385	R-12 Application Hose for the A/C Stop Leak (0.25" FFL)
98037169	A/C Charge Hose - Low side R-134a

MIST™ UNIT

98002351	MiST piezo repair kit (serial numbers prior to 11000)	
98002340	Fan with Waterproof Connector	
98002350	MiST fan repair kit (serial numbers prior to 11000)	
99090575	MiST™ POS Consumer Cards	

MOTORVAO®

Your partner in preventive maintenance™



MACHINES | CHEMICALS | ADAPTERS

NEXT GENERATION LEAK DETECTION FOR FORCED INDUCTION GASOLINE AND DIESEL ENGINES.


COOL SMOKE® HP DELIVERS MARKET-LEADING EASE OF USE, RELIABILITY AND LEAK DETECTION.

COOL SMOKE® HP

- Control CoolSmoke® HP with your Android® or Apple® mobile device
- Delivers dense smoke across its entire operating range of 3-60 psi unlike competitive products that must reduce smoke output at higher pressures due to limitations in their technologies
- 3.5 inch multicolor digital LCD display
- The Cool Smoke® HP operates on 12 or 24 volt DC, is not polarity sensitive and draws minimal current. Smoke is produced without heat, making it safer, more reliable and more energy efficient than competitive models
- Customer configurable settings include multiple languages and units of measure
- Multiple adapter configurations ensure the ability to connect to any automotive induction system

500-0150 Cool Smoke® HP with Turbo Adapter Kit

500-0150NA Cool Smoke® HP without adapters

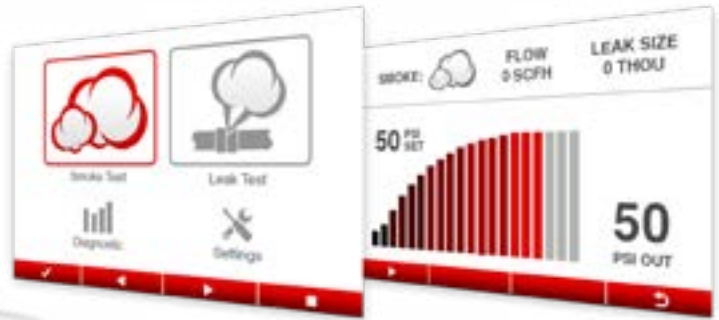

200-0150
Turbo Adapter Kit

Model	Cool Smoke® HP
Input	12 to 24 VDC 1A (not polarity dependent)
Machine Dimensions	
Height	33 cm (13")
Width	28 cm (11")
Depth	46 cm (18")
Carton Dimensions	
Height	38 cm (15")
Width	46 cm (18")
Depth	51 cm (20")
Shipping Weight	4.5 kg (9.8 lbs)
New Fluid Capacity	120 mL (4.1 fl oz)
Waste Tank Capacity	N/A
Length of Power Cord	3 m (10 ft)
Length of Hose	2.5 m (8 ft)
Warranty	One Year

FOR USE WITH COOLSMOKE® HP



COOLSMOKE® REPLACEMENT FLUID

Designed specifically for use with the MotorVac Cool Smoke System

- CoolSmoke fluid with UV Dye pin-points leaks faster and more accurately than any other leak detection fluid
- Environmentally friendly

400-1054 6.8 oz

400-1055 4.1 oz (won't overfill unit)



WV605

Finds leaks with smoke and dye. Accurate flow meter measures leak size. 'Test' mode and smoke flow control.

VACUTEC® LEAKFINDER®

Diagnostic Smoke® and UltraTraceUV® Dye

Vacutec® Leakfinder is the simplest and quickest way to find low-pressure leaks in multiple vehicle systems. Its patented technology was designed in collaboration with multiple major OEMs to establish a standard for leak detection. Designed safe for all vehicle systems, use will not void factory warranties and is OEM APPROVED. It is the only smoke technology in the world that meets SAE INTERNATIONAL safety standard recommendations.



The world's best selling smoke technology – in more workbays than all competitors combined!

- Smoke test with Patented UltraTraceUV® Smoke Solution: Deposits a fluorescent dye at exact leak location. It's the only non-contaminating & non-permanent OEM-Approved smoke technology dye making it safe to use, will not void vehicle factory warranty.
- Includes additional 12 oz bottle of UltraTraceUV dye, good for hundreds of tests
- Operates with shop air for general purpose testing (e.g. vacuum, exhaust, wind & water leaks etc.), or inert gas for safer EVAP testing
- Automatic electronic safety valve shuts off air flow into vehicle's EVAP system when machine turns off, preventing gasoline fumes continually exiting the EVAP system and filling your work bay
- Auto-correct EVAP pressure setting; non-adjustable to avoid accidental over-pressure
- Approved for Flex-Fuel vehicle testing
- 1 Year Warranty
- Full range flow meter detects: gross (.080") small (.040") and very small (.020") leaks. Capable of detecting leaks smaller than .010"
- Non-smoke 'Test' mode (in addition to smoke mode)
- Smoke Flow Volume Control

INERT GAS PACK

Designed to work in combination with all current Vacutec smoke machines. Inert Gas Pack provides safer EVAP testing in a very portable kit. It provides all the power of a large gas cylinder but fits into the palm of your hand. Can perform between 25-50 full-cycle EVAP tests per filled cylinder and is inexpensive to refill.

Included: Preset CO2 regulator with cylinder fitting, pressure gauge, universal push-on female coupler and 20 oz. liquid CO2 cylinder. (Cylinder arrives empty).

Meets SAE International technical papers recommending inert gas for EVAP system testing (2008-01-0554 & 2007-01-1235).

Using air as the smoke carrier is not recommended in SAE papers or by automakers when testing fuel vapor (EVAP) system. Air can create a flammable fuel mixture in the vehicle's fuel tank. **OEMs** also require the use of an inert gas when testing an EVAP system.

WVA-060





COMBINATION LIGHT WHITE, UV, & LASER

Includes batteries and yellow glasses.

- Included with WV605

WVA-065



PRE-SET GAS FLOW REGULATOR 100 PSI

No adjustments needed, always guarantees proper operating pressure for any smoke machine.

- Easily connects to nitrogen cylinder and to coiled hose (WVA-041)

WVA-051



POWER CONVERTER

Connects to smoke tester and grounded wall power outlet, to avoid using the vehicle battery as a power source.

AC input: 100-240V AC/5A 50/60Hz

DC output: 12V 25A

WVA-080



EVAP SERVICE PORT ADAPTER FITTING

Standard Size

- Evap Service Port Kit (OBD-II); connects to most factory-installed fittings for accessing OBD-II EVAP system
- Included with: WV605, EELD601

WVA-006



ASSORTED CAP-PLUG SET

Cap Plug Kit

- Designed to seal a wide range of openings, ranging in sizes from 1 3/4" to 4 1/2" and 1/8" to 3/16"
- Useful for inside and outside diameter openings, each cap plug is made from molded vinyl
- Included with: WV605, EELD601

WVA-002



DUAL-SIZE SCHRADER REMOVAL/INSTALLATION TOOL

Removal and installation tool for EVAP service ports

- Included with: WV605, EELD601

WVA-049



SMOKE DIFFUSER

For finding wind/water leaks

- Made of molded polyvinyl, resistant to chemicals and abrasion
- Slows and concentrates the EVAPro smoke for use in diagnosing wind and water leaks in vehicle passenger compartments
- Included with: WV605, EELD601

WVA-003

THE ONLY SMOKE TECHNOLOGY IN THE WORLD THAT MEETS SAE INTERNATIONAL SAFETY STANDARD RECOMMENDATIONS.

UltraTraceUV® CONTAMINANT-FREE DYE SOLUTION

- Smoke test with the ONLY OEM approved non-contaminating and non-permanent smoke solution (the smoke that won't stink!)
- Deposits UV-activated fluorescent dye at the exact location of a leak
- Non-contaminating and non-conductive
- 12 oz services approx. 350 test cycles
- 16 oz services approx. 500 test cycles

UltraTraceUV® SMOKE SOLUTION

- The same OEM-Approved formula without dye
- Non-contaminating and non-conductive



Part No.	Description	Size
WV0712UV	UltraTraceUV® Contaminant-Free Dye Solution	12 oz. bottle
WV0716	UltraTrace® The same OEM-Approved formula <i>without dye</i>	12 oz. bottle
WV0716UV	UltraTraceUV® Contaminant-Free Dye Solution	16 oz. bottle



POWERFUL FOCUSED-BEAM UV LIGHT

Highlights the fluorescent dye, from the UltraTraceUV® smoke vapor, that the Vacutec® smoke machines deposit at the exact location of a leak.

- Includes yellow glasses

WVA-074

Only bladder tool on the market with patented bendable technology



SMALL BLADDER PLUG WITH THROUGH-HOLE

- 1.25" expands to seal small diameter openings up to 4" with included hand pump
- Body will flex for curved applications
- Patented bladder easily conforms to round or irregular shapes

WVA-132

HEAVY DUTY BLADDER PLUG WITH THROUGH-HOLE AND PRESSURE POP-OFF VALVE

- 2.9" expands to seal or plug large intake or exhaust openings of up to 6"
- Body will flex for curved applications
- Heavy duty bladder easily conforms to round or irregular shapes

WVA-124

BLADDER PLUG WITH THROUGH-HOLE

- Includes spare bladder replacement
- Body will flex for curved applications
- 1.9" expands to seal large intake or exhaust openings of up to 6"/152mm
- Bladder resists heat better than others (up to 375°F/190°C)

WVA-096

BLADDER REPLACEMENT

- Fits WVA-096

WVA-098



BRILLIANTLY SIMPLE AND REUSABLE!
SAVE MONEY, NO COSTLY REPLACEMENT SEALS NEEDED—
USE WITH ANY SMOKE MACHINE OR OTHER LEAK
DETECTION DEVICE



UNIVERSAL ADAPTER

Use with any smoke machine or other leak detection device (Standard)

- Quickly pops-on virtually any filler neck

WVA-063



UNIVERSAL ADAPTER

(for BMW /MINI)

- Specifically designed for BMW and MINI filler necks
- U.S. Patent 8,408,047

WVA-064



CAPLESS ADAPTER

Fits double-door capless fuel tanks

- Specifically designed for new capless fuel tanks
- U.S. Patent 8,998,170

WVA-078




EXHAUST CONE ADAPTER

Exhaust Cone 6" in length and tapered from 1" to 3 1/2", the Exhaust Cone is designed for use in diagnosing exhaust system leaks.

- Made from EPDM rubber with a neoprene inlet hose, the Exhaust Cone has a 3/8" smoke channel and will fit a wide variety of tailpipe diameters
- Included with: WV605, EELD601

WVA-001



LARGE CONE ADAPTER

Used to introduce smoke into engine intake systems and large exhaust systems.

- Size: 3.5" x 6" x 4.5" long
- Included with WV605

WVA-067

MOTORVAC GDI CLEANING SOLUTION

Up to 65% better deposit removal than existing methods.

Our patent pending chemical formula has been designed to dissolve or break down deposits without disassembling parts of the intake assembly. The cleaner will emulsify the deposits and the rinse will remove the softened deposits. These deposits will easily burn in the combustion chamber. Our friction modifier will lubricate the valves and combustion chambers for better compression.

PATENT PENDING CHEMICALS

GDi deposits are unlike traditional carbon deposits. Our chemicals are specifically designed for GDi intake deposits with components that comprise formulas that are superior to existing products. We use a chemical that softens and dissolves the deposits ensuring no chunks are dislodged which could cause damage to downstream components including the combustion chambers, turbochargers, and catalytic converters.

PATENT PENDING PROCESS

Our main advantage is that no one else is going behind the throttle plate. The location of the adapter/nozzle, positioned behind the throttle plate in the center of the air passage that leads to the intake plenum, takes advantage of the plenum architecture which has been designed to lead air from the throttle plate equally to each of the cylinders resulting in the best possible distribution of the chemicals.

400-0458 GDI 2-PART KIT

500-0467 GDI TOOL

067-1730 UNIVERSAL GDI MAP SENSOR ADAPTER .40GPH



Adapters

Brand	Name	Displacement	Adapter Part #
BMW	B48	1998 cc	067-1722
	EcoBoost 1.6	1596 cc	067-1701
	EcoBoost 2.0	1999 cc	067-1701
Ford	EcoBoost 2.3	2261 cc	067-1723
	EcoBoost 2.7	2694 cc	067-1703
	EcoBoost 3.5	3496 cc	067-1704
GM	Ecotec LUJ/LUV	1364 cc	067-1705
	Ecotec LEA	2384 cc	067-1710
	5.3L		067-1724
Hyundai/Kia	Gamma GDi 1.6	1591 cc	067-1720
	Nu GDi 2.0	1999 cc	067-1720
	Theta GDi 2.0	1998 cc	067-1720
	2.0T GDi Turbo	1998 cc	067-1720
Nissan	5.6L DIG V8		067-1721

DIESELTUNE™ EGR CLEANING TOOL

For Diesel EGR System Cleaning on intake and exhaust sides of EGR valve and cooler.

- Designed for on-vehicle cleaning of the EGR circuit
- Our EGR adapters are field tested and designed to deliver the most effective service
- Designed for many Diesel EGR applications including Cummins, Ford, GM, VW and more

500-0170 DieselTune™ EGR Cleaning Tool

500-0170M DieselTune™ EGR Cleaning Tool with Manifold

Model	DieselTune™ EGR Cleaning Tool
Input	N/A
Machine Dimensions	
Height	40.6 cm (16")
Width	19 cm (7.5")
Depth	19 cm (7.5")
Carton Dimensions	
Height	42 cm (16.5")
Width	26.7 cm (10.5")
Depth	29.8 cm (11.75")
Shipping Weight	4.8 kg (10.8 lbs)
New Fluid Capacity	2 L (2.1 qt)
Waste Tank Capacity	N/A
Length of Power Cord	N/A
Length of Hose	2.4 m (8 ft) and 2.1 m (7 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com



FOR USE WITH DIESELTUNE™ EGR CLEANING TOOL



MOTORVAC® EGR SYSTEM CLEANER

- Cleans the EGR circuit removing stubborn carbon deposits, eliminating the need for tear-down and part replacement
- Cleans variable geometry turbo chargers (VGTs) and vanes
- Lowers emissions and smooths rough idle

400-0280 *Not available in Canada*



MOTORVAC® COMPLETE FUEL SUPPLEMENT

- Raises cetane number four to six points
- Improves cold weather starting
- Eliminates water using exclusive HydroBond Technology
- Reduces DPF regeneration cycles
- Meets CEC F 098-08 DW10 injector cleaning standard

400-3022



MOTORVAC® MAX STRENGTH FUEL INJECTOR CLEANER

- Exceeds industry injector cleaner standards for Cummins L-10 and CEC DW10
- Eliminates water using our exclusive HydroBond Technology
- Increases cetane by up to three points

400-3012

Visit us online at cpsproducts.com

**Need assistance to find an adapter?
E-mail us at cs@cpsproducts.com**



DieselTune™ EGR Cleaning



CARBONCLEAN® 1000

Everything you need to provide The Tune-Up for the 21st Century!
Complete, professional through-rail fuel system decarbonizing service

The CarbonClean 1000 provides a thorough cleaning of the fuel rail and engine decarbonizing service, with the convenience of a simple hook up utilizing our online application guide and easy to use fuel adapter connect set.

- Unique time saving adapter system makes connecting to the rail simple and fast
- Premixed detergent solution utilizes proprietary CarbonClean chemistry
- Provides fuel pump performance diagnostic capabilities as well as fuel system functionality
- Online application guide

500-0220



Online MotorVac Application Guide

Scan the QR code or type in the URL to view step-by-step instructions.
motorvacapplicationguide.com


Model	CarbonClean® 1000
Input	12 VDC 1A
Machine Dimensions	
Height	99 cm (39")
Width	28 cm (11")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	8.6 kg (20 lbs)
New Fluid Capacity	Single use can
Waste Tank Capacity	N/A
Length of Power Cord	4.9 m (16 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com



300-3200
Dust Cover



200-0122
S Tool

FOR USE WITH CARBONCLEAN® 1000



CARBONCLEAN® MV5

Fuel System Cleaner and Engine Decarbonizer

- Super concentrated detergent package rapidly cleans fuel system including injectors and intake valves
- Exclusive Hydrobond™ Technology uses proprietary chemistry to “steam clean” combustion chamber deposits
- Works exclusively with CarbonClean® 1000

400-0050



CARBONCLEAN® MV6

Fuel System Cleaner and Engine Decarbonizer

- Super concentrated detergent package rapidly cleans fuel system including injectors and intake valves
- Exclusive Hydrobond™ Technology uses proprietary chemistry to “steam clean” combustion chamber deposits
- Works with any pressurized canister tool with fuel rail connectivity

400-0060

Visit us online at cpsproducts.com




CARBONCLEAN® 245

Professional Fuel System Service and Diagnostic Center

- Advanced electronic controls
- Unique safety features allow system to run unattended
- Fuel system diagnostic capabilities allow up to five different tests to be performed
- The CarbonClean 245 comes with the ICS Kit Part#200-8667

500-0245

Model	CarbonClean® 245
Input	12 VDC 6A
Machine Dimensions	
Height	96.5 cm (38")
Width	58.4 cm (23")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	34 kg (75 lbs)
New Fluid Capacity	4.7 L (5 qt)
Waste Tank Capacity	N/A
Length of Power Cord	3 m (10 ft)
Length of Hose	3 m (10 ft), 3.7 (12 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com



200-8667
ICS Kit (Included)

FOR USE WITH CARBONCLEAN® 245



CARBONCLEAN® MV3

Fuel System Cleaner Concentrate

- Proprietary gas/petrol detergent concentrate
- Eliminates soft carbon and other contaminants
- Contains no harmful alcohols such as methanol and hexanol which are known to damage seals

400-0020 (8 oz)

400-0126 (32 oz)



CARBONCLEAN® MV4

Intake System Cleaning Detergent

- Incorporates a foaming action to decarbonize air intake, plenum, throttle body, intake runners and intake valves
- Applied using the ICS kit or S-Tool canister
- Not harmful to seals

400-0030



CARBONCLEAN® DUAL

Complete Fuel System Service for both Gasoline and Diesel Engines

- The CarbonClean Dual services both gasoline and diesel engines to clean the entire fuel system. When used with fuel system cleaning detergents and the Intake Cleaning Kit, CarbonClean Dual cleans the gasoline engine's air plenum, throttle body, air bypass valve, injectors, valves, combustion chambers, oxygen sensor and catalytic converters without having to remove any engine components. When used with diesel detergent, CarbonClean Dual cleans the diesel fuel injectors, injector pump and combustion chambers
- Works on port-fuel, TBI, CIS, and carbureted systems
- Safely dissolves contaminants, gum and varnish deposits, capturing them in the built-in 10 micron filter
- Cleans injector screens, intake and exhaust valves, top of pistons, combustion chamber, oxygen sensor and catalytic converter
- Safely dissolves and removes soft carbon deposits and passes them through the exhaust


500-0352



View adapters by scanning or go to cpsproducts.com



200-3025A
Standard Adapters (Included)



200-3026A
Deluxe Adapters (Included)



200-8667
ICS Kit (Included)

Model	CarbonClean® Dual
Input	12 VDC 6A
Machine Dimensions	
Height	96.5 cm (38")
Width	58.4 cm (23")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	40.8 kg (90 lbs)
New Fluid Capacity	2 L (2.1 qt) for Petrol and Diesel
Waste Tank Capacity	N/A
Length of Power Cord	2.7 m (9 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year

FOR USE WITH CARBONCLEAN® DUAL



MOTORVAC® CARBONCLEAN® MV3 and MOTORVAC® DieselTune™ MV3D

Fuel System Cleaner and Engine Decarbonizer

- The CarbonClean Dual works with MV3 gas/ petrol concentrate and the MV3D diesel concentrate

400-0020 CarbonClean MV3

400-0010 DieselTune MV3D

MotorVac Detergents Clean From the Inside Out

- Our CarbonClean detergents will loosen and dissolve the resin, gum and varnish that build up throughout an engine's entire fuel system.
- Our cleaning process starts from the air intake, all the way through to the exhaust system.
- CarbonClean detergents use a proprietary formula that combines various elements to form a strong-yet-safe cleaner.
- Our detergents do not contain methanol, isopropanol, hexanol, butanol or ethanol, all known to be corrosive in fuel.
- CarbonClean detergents will not damage the engine components and can be used with confidence.

DIESELTUNE™

Professional Fuel System Service for Diesel Engines

DieselTune is a 2-line cleaning system that connects to the engine through OEM specific adapters. DieselTune passes a concentrated mixture of MotorVac cleaning detergent and diesel fuel through the components of the fuel system while the engine is running. The system removes organic and inorganic fuel deposits that build up in fuel injectors, injection pumps and combustion chambers. Carbon, gum and varnish deposits in the entire upper engine are dissolved and removed during combustion, then passed through the exhaust.

- Variable pressure for diesel lift pumps up to 100psi or 6.8 bar
- Safely dissolves carbon deposits on diesel engines through exclusive soak mode
- Microprocessor-based controls for automatic operation
- Automatically maintains correct pressure and flow for worry-free operation
- Safe for use in all diesel engines, including heavy-duty truck applications
- Patented microprocessor for ease of use
- Lowers exhaust opacity and harmful emissions
- Automatically maintains correct pressure and flow for worry-free operation
- Exclusive soak mode for deep cleaning of the fuel delivery system
- Restores fuel economy and horsepower
- Extends fuel injector and fuel pump life

500-4006P

Model	DieselTune™
Input	12 VDC 6A
Machine Dimensions	
Height	99 cm (39")
Width	53.3 cm (21")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	36.3 kg (80 lbs)
New Fluid Capacity	17.4 L (4.6 gal)
Waste Tank Capacity	N/A
Length of Power Cord	3 m (10 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com

FOR USE WITH DIESELTUNE™



MOTORVAC® DieselTune™ MV3D

Fuel System Cleaner and Engine Decarbonizer

- The CarbonClean Dual works with MV3 gas/ petrol concentrate and the MV3D diesel concentrate

400-0010 DieselTune MV3D



Dirty injectors impede flow and dispersion of fuel. Clean injectors improve fuel system efficiency and performance.



TRANSTECH™ IV+

Inline and Dipstick Automatic Transmission Fluid Exchange System

The TransTech IV+ combines both Inline and Dipstick capabilities allowing for the two most common methods of ATF exchange from a single machine. With both Inline and Dipstick services together in one cabinet, the TransTech IV+ occupies reduced floor space with minimal investment while providing service to a wider variety of vehicles.

Inline Exchange

This conventional ATF exchange method provides an effective transmission flush by connecting directly to the transmission cooler lines. New fluid flows through the transmission as old fluid is directed into the TransTech IV+ waste tank in a 1-to-1 ratio.

Dipstick Exchange - The TransTech IV+ features a convenient Dipstick option that allows an effective ATF exchange through the transmission dipstick tube. This useful alternative is suitable when cooler lines are corroded or difficult to access.

- **Automatic Inline Exchange** - Connect to a transmission cooler line and press one button—walk away until the service is complete
- **Dipstick Exchange** - A convenient dipstick tube exchange requiring no tools or adapters
- **Drain Pan Feature** - Allows operator to drain transmission pan for a convenient and mess-free filter change
- **Transmission Cooler Flush Feature** - Allows operator to flush transmission cooler and cooler lines
- **Patented Level Synchronization** - Ensures the transmission cannot be under or overfilled
- **Automatic Bypass** - Ensures that transmission will not run out of fluid during the exchange process
- **26 Quart New Fluid Reservoir** - Allows user to service large capacity transmissions
- **High Volume Pump** - For rapid and efficient service

500-1125B

Model	TransTech™ IV+
Input	12 VDC 8A
Machine Dimensions	
Height	99 cm (39")
Width	53.3 cm (21")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	40.8 kg (90 lbs)
New Fluid Capacity	24.6 L (26 qt)
Waste Tank Capacity	24.6 L (26 qt)
Length of Power Cord	3 m (10 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com

FOR USE WITH TRANSTECH™ IV+



MOTORVAC® UNIVERSAL ATF PROTECTANT

By using MotorVac Universal ATF Protectant, a full service facility can service virtually all vehicles by stocking only synthetic DEXRON® III and DEXRON® VI.

- Eliminates the need to stock multiple ATF types
- Prolongs transmission life by reducing excessive heat and friction
- Ensures smoother shifting and eliminates transmission shudder
- Conditions and restores seals and O-rings to help eliminate leaks

400-1030AS



MOTORVAC® TRANSTECH™ TT2K

2-Step Cleaning and Conditioning Kit

- Add the service chemical in through the dipstick

STEP 1 TT1 ATF Cleaner:

Removes varnish, sludge and contaminants that build up in the transmission.

STEP 2 TT2 ATF Conditioner:

Rejuvenates seals and reduces the possibility of leaks. The conditioner also reduces oxidation and heat-related breakdowns.

400-0137 (2 Step Kit)

TRANSTECH™ III+

Inline Automatic Transmission Fluid Exchange System

A complete professional inline automatic transmission fluid exchange system that is now even easier to use with our new automatic flow direction technology and our exclusive inline chemical treatment program. The TransTech III+ advanced electronic interface allows complete, "one touch" control. It even has a quick and easy "Drain Pan" function for spill free transmission filter changes during ATF exchange. The TransTech III+ connects through transmission cooler lines and provides a clean, environmentally-friendly and systematic approach to servicing automatic transmissions. The unit will flush virtually all of the old transmission fluid and replace it with the new fluid while controlling the flow automatically with the engine running.

- **Automatic Inline Exchange**
Connect to a transmission cooler line and press one button—walk away until the service is complete
- **Drain Pan Feature**
Allows operator to drain transmission pan for a convenient and mess-free filter change
- **Transmission Cooler Flush Feature**
Allows operator to flush transmission cooler and cooler lines
- **Patented Level Synchronization**
Ensures the transmission cannot be under or overfilled
- **Automatic Bypass**
Ensures that transmission will not run out of fluid during the exchange process

500-1100B

Model	TransTech™ III+
Input	12 VDC 8A
Machine Dimensions	
Height	99 cm (39")
Width	53.3 cm (21")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	66 cm (26")
Depth	53 cm (21")
Shipping Weight	39.5 kg (87 lbs)
New Fluid Capacity	24.6 L (26 qt)
Waste Tank Capacity	24.6 L (26 qt)
Length of Power Cord	3 m (10 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com



FOR USE WITH TRANSTECH™ III+



TRANSTECH™ ATF CLEANER AND PROTECTANT CARTRIDGES

2-step inline kit
400-0137EU



TRANSTECH™ INLINE SERVICE KIT

For vehicles with no dipstick.

- New inline starter kit allows the cleaner and protectant to be introduced directly into the transmission cooler system
- Applies service chemicals in the most effective way
- Includes ATF Cleaner and Protectant Cartridges and Spotgun

300-4110



STEERCLEAN™ 1000

A Fast and Efficient Power Steering Exchange Machine SteerClean is designed to exchange virtually all of a vehicle's power steering fluid in just 5 minutes with a few simple steps.

SteerClean can increase a shop's profits by reducing the time it takes to do a complete exchange and simplifies the process for the technician. This new turnkey PSF service center is easy to use with a one-touch control and provides a highly effective service for all automotive vehicles. The SteerClean System will ensure that you are conducting the best service possible.

Friction and heat in the power steering system causes oxidation that breaks down the fluid and its lubricating ability. This can accelerate wear in the pump, valves and gears and result in expensive repairs. Debris and contaminants in the power steering system can cause the valves and other components to stick, dry and worn out seals can lead to leaks, and foaming can lead to vibration in the system, all creating difficult steering and problems in the system. The SteerClean Service will improve the operation of the steering system and extend its life.

- Long wand allows for service on vehicles with remote reservoir
- Safe and effective preventive maintenance service to improve steering performance and extend component life
- The service can be performed safely and compatible with all domestic vehicles

500-7050

Model	SteerClean™ 1000
Input	12 VDC 6A
Machine Dimensions	
Height	96.5 cm (38")
Width	55.9 cm (22")
Depth	43 cm (17")
Carton Dimensions	
Height	109 cm (43")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	38.6 kg (85 lbs)
New Fluid Capacity	2 L (2.1 qt)
Waste Tank Capacity	3.8 L (1 gal)
Length of Power Cord	3 m (10 ft)
Length of Hose	2.7 m (9 ft)
Warranty	One Year

FOR USE WITH STEERCLEAN™ 1000



STEERCLEAN™ SCK1000

2-Step Cleaning and Conditioning Kit

STEP 1 SteerClean Power Steering Flush Detergent removes varnish and sludge deposits to increase fluid circulation and extend component life. Promotes a better fluid exchange.

STEP 2 SteerClean Power Steering Fluid Conditioner protects against wear and noise and helps keep the system clean after a service. Conditions seals to prevent potential leaks.

400-1045 (2 Step Kit)

COOLANTCLEAN™ III

Professional coolant exchange service in just minutes.

The CoolantClean III exchanges virtually all of the used coolant mixture in a vehicle's cooling system in a few simple steps. The CoolantClean III coolant flush service can increase a shop's profits by reducing the time it takes to do a complete fluid exchange to approximately 15 minutes. Simply by connecting to the vehicle's upper radiator hose, the unit will flush virtually all of the old coolant and replace it with the new coolant

- Static or dynamic fluid exchange
- One switch, multi-function operation with "closed loop" mode at end of service
- Unique "vacuum switch" regulates system depressurization and fluid evacuation
- Complete flow synchronization maintains a 1-to-1 fluid ratio exchange
- Front panel controls all machine functions with pressure gauge and warning lights
- Industrial grade radiator hoses and adapters included to service most vehicles
- Dual pump operation (Air diaphragm pump pneumatic)
- Manual control ball valves
- Pressure is limited to 10 psi – if cap malfunctions, fluid will overflow into reservoir

500-5100P With Standard Adapter Kit

500-5100PD With Standard Adapter Kit plus De-Gas and Coolant Flow Direction adapters

Model	CoolantClean™ III
Input	12 VDC 8A
Machine Dimensions	
Height	96.5 cm (38")
Width	58.4 cm (23")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	31.8 kg (70 lbs)
New Fluid Capacity	24.6 L (26 qt)
Waste Tank Capacity	24.6 L (26 qt)
Length of Power Cord	3 m (10 ft)
Length of Hose	2.4 m (8 ft)
Warranty	One Year



View adapters by scanning or go to cpsproducts.com



Coolant Flow Direction Adapter
200-8975



De-Gas Adapter
200-8715

FOR USE WITH COOLANTCLEAN™ III



COOLANTCLEAN™ CC2K

2-Step Cleaning and Conditioning Kit

STEP 1 CC5 removes rust, scale, and other contaminants.

STEP 2 CC6 contains rust and corrosion inhibitors which help to prevent deposits that can lead to overheating.

400-0138 (2 Step Kit)

CARCLEAN™ SYSTEM

HVAC and Interior Sanitizing System

- Sanitizes and disinfects the entire HVAC system and passenger cabin
- Restores in-vehicle air quality for a healthier driving environment
- Portable. Operates on 12 volt DC

500-0500

Model	CarClean™ System
Input	12 VDC

Machine Dimensions

Height	33 cm (13")
Width	14 cm (5.5")
Depth	19 cm (7.5")

Carton Dimensions

Height	35 cm (13.8")
Width	20.3 cm (8")
Depth	14 cm (5.5")
Shipping Weight	2.1 kg (4.5 lbs)
New Fluid Capacity	100 mL (3.4 fl oz)
Waste Tank Capacity	N/A
Length of Power Cord	1 m (3.5 ft)
Length of Hose	N/A
Warranty	One Year



FOR USE WITH CARCLEAN™ SYSTEM



MIST™ ULTRASONIC SOLUTION

- New fresh scent! Cleans and restores the vehicle's HVAC system and cabin
- Designed to work with the CarClean™ System

400-0501



MIST™ VENT CLIP FRESHENER

- Adds a 'new car' scent to the vehicle's ventilation system and cabin

400-0525

COOLSMOKE®

The next generation of EVAP Leak Detection

- Pressure and vacuum leak diagnostics with instant smoke solution containing UV enhanced dye
- Two ways to spot the leak
- Does not use heat to create smoke

500-0100

Model	Cool Smoke®
Input	12 VDC 0.75A
Output	.45 Psi

Machine Dimensions

Height	29.2 cm (11.5")
Width	34.3 cm (13.5")
Depth	28 cm (11")

Carton Dimensions

Height	35.6 cm (14")
Width	35.6 cm (14")
Depth	30.5 cm (12")
Shipping Weight	8 kg (18.5 lbs)
New Fluid Capacity	120 mL (4 fl oz)
Waste Tank Capacity	N/A
Length of Power Cord	3 m (10 ft)
Length of Hose	3 m (10 ft)
Warranty	One Year



Improve performance with UV Phazer™ Black™ (#413075)

FOR USE WITH COOLSMOKE®



COOLSMOKE® REPLACEMENT FLUID

Designed specifically for use with the MotorVac Cool Smoke System

- CoolSmoke fluid with UV Dye pin-points leaks faster and more accurate than any other leak detection fluid
- Environmentally friendly

400-1054 6.8 oz

400-1055 4.1 oz (won't overfill unit)

Visit us online at cpsproducts.com



DIFF-VAC™ 1000

Differential Exchange System

- Two 5 GPM diaphragm pumps allow for deep vacuum for extraction of high viscosity fluids regardless of temperature conditions

Air operated – no need to waste time locating and connecting to battery terminals

Two dedicated pumps – no cross contamination between used and new fluids

Optional Drain Hose – does not limit the amount of fluid that can be recovered

Easy to operate – does not require disconnection of lines or hoses

500-9025

Model	Diff-Vac™ 1000
Input	
Machine Dimensions	
Height	99 cm (39")
Width	53.3 cm (21")
Depth	48 cm (19")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	19.5 kg (43 lbs)
New Fluid Capacity	2 L (2.1 qt)
Waste Tank Capacity	3.8 L (1 gal)
Length of Power Cord	3 m (10 ft)
Length of Hose	2.4 m (8 ft)
Warranty	One Year



BRAKEVAC™ II

Premium Brake Fluid Flush System

The BrakeVac II brake bleeder machine is a simple, user-friendly and efficient way to flush and bleed today's high-tech brake systems. This system can complete a full brake system flush in 10 minutes with only one operator, thereby lowering labor costs and maximizing profits.

- Performs brake flush using pressure and vacuum simultaneously
- Vacuum pump to easily remove fluid from brake fluid reservoir
- Complete brake system flush in just 10 minutes
- Pressure and vacuum assist, ensuring quick operation
- Adjustable pressure regulator controls operating pressure
- Drain switch to empty new fluid tank for changing to different brake fluids
- Easy to view tank allows for fast visual check of fluid in the reservoir
- Pressure and vacuum assist ensuring quick operation.
- Adjustable pressure regulator controls operating pressure

500-8100

500-8105 BrakeVac unit (without adapters)



View adapters by scanning or go to cpsproducts.com

Model	BrakeVac™ II
Input	12 VDC 15A
Machine Dimensions	
Height	96.5 cm (38")
Width	53.3 cm (21")
Depth	43 cm (17")
Carton Dimensions	
Height	104 cm (41")
Width	61 cm (24")
Depth	48 cm (19")
Shipping Weight	38.6 kg (85 lbs)
New Fluid Capacity	3.8 L (1 gal)
Waste Tank Capacity	3.8 L (1 gal)
Length of Power Cord	42 cm (16.5")
Length of Hose	29.2 cm (11.5")
Warranty	One Year

200-3118M

STANDARD ADAPTERS (INCLUDED)

* BrakeVac II unit may also be purchased without adapters. Part number 500-8105. OEM specific adapters are available.



	Part#	Description	Std Pack	ITF-14 Master Carton	UPC	Weight (lbs)		Unit (inches)			Case (inches)		
						Unit	Case	Length	Width	Height	Length	Width	Height
	 400-0020	MotorVac® CarbonClean® MV3 (8 oz)	12	16286044000201	628604006329	0.55	6.95	2.25	2.25	5.63	7.25	9.25	6.25
	 400-0126	MotorVac® CarbonClean® MV3 (32 oz)	4	16286044001260	628604006343	2.05	8.70	2.88	4.00	8.25	7.00	8.75	9.00
	 400-0030	MV4 Intake Cleaning Detergent	12	16286044000300	628604006367	0.55	6.95	2.25	2.25	5.63	7.25	9.25	6.25
	 400-0050	MotorVac® CarbonClean® MV-5 (17 oz)	6	16286044000508	628604006961	1.25	7.90	2.75	2.75	8.50	8.00	5.75	9.00
	 400-0060	MotorVac® CarbonClean® MV-6 (16 oz)	6	16286044000607	628604006923	1.05	6.45	2.75	2.70	7.00	8.00	5.50	7.75
	 400-9900	2-Part Fuel Kit	11	16286044099007	628604004226	1.80	20.37	2.75	6.00	8.25	13.50	12.50	8.50
	 400-9910	Complete Fuel System Kit	8	16286044099106	628604004226	2.15	18.14	2.75	8.00	8.25	13.50	12.50	8.50
	 400-1205	GDI Maintenance Kit	6	16286044012051	628604005384	3.00	18.75	4.38	7.00	8.50	14.00	10.50	9.75
	 400-0456	GDI 2 part kit	6	-	6286040004586								
	 500-0467	Motorvac GDI Induction Tool	1		628604027126								
	 400-2001	Fuel System Cleaner	12	16286044020018	628604004165	0.75	9.10	1.75	2.25	7.75	11.50	6.88	8.50
	 400-2018	Intake Cleaner	12	16286044020186	628604004189	0.35	4.85	2.13	2.13	5.25	9.50	7.00	6.75
 	 400-0270	Concentrated Fuel Treatment	24	16286044002700	628604005407	0.15	3.75	1.25	1.25	4.25	5.50	8.00	5.00
	 400-0010	DieselTune MV3D	12	16286044000102	628604006305	1.0	12.6	2.75	2.75	7	8.5	11	8



	Part#	Description	Std Pack	ITF-14 Master Carton	UPC	Weight (lbs) Unit	Case	Length	Unit (inches) Width	Height	Case (inches) Length	Width	Height
	 400-0280	EGR System Cleaner <i>Not available in Canada</i>	12	16286044002809	628604008309	2.2	27.6	3.25	3.25	9	13.75	10.5	10
	 400-3022	Complete Fuel Supplement	12	16286044030222	628604001492	.75	9.3	1.75	2.25	7.75	10	8.5	8.5
	 400-3012	Max Strength Fuel Injector Cleaner	12	16286044030123	628604001454	.70	8.95	1.75	2.25	7.75	10	8.5	8.5
	 400-5000EU	Engine Oil Cleaner	12	16286044050008	628604004646	1.05	12.75	2.75	2.75	6.75	11.25	8.50	7.75
	 400-6220	Engine Treatment	12	16286044062209	628604005049	0.90	10.91	1.75	2.25	7.75	11.50	6.88	8.50
	 200-1026	OilClean OC2B 2 Part Service Kit	6	16286044010262	628604006466	1.15	7.00	2.75	5.00	6.75	8.75	11.25	7.50
	 400-0137	TT2K 2-Step Cleaning and Conditioning Kit	6	16286044001399	628604006381	1.05	6.90	2.25	4.50	5.63	7.50	9.25	6.25
	 400-0137EU	TransTech™ Inline Service Kit	3	16286044001376	628604004622	1.15	4.00	2.00	3.50	9.50	4.00	5.75	10.00
	 400-1045	2-Step Cleaning and Conditioning Kit	6	16286044010453	628604006442	1.10	7.25	2.25	4.50	5.63	11.50	6.88	8.50
	 400-0138	CC2K 2-Step Cleaning and Conditioning Kit	6	16286044001383	628604006404	1.15	7.35	2.25	4.50	5.63	7.75	9.25	6.25
	 400-0501	CarClean MiST Ultrasonic Solution	12	16286044005015	62860411828	0.30	3.65	2.00	2.00	4.50	12.75	4.75	5.00
	 400-0525	CarClean MiST Vent Air Fresheners	12	16286044005251	628604006428	0.004	0.05	-	-	-	4.00	6.00	0.10
	 400-1054	CoolSmoke Replacement Fluid with Dye	1		628604001287	0.45	-	1.25	3.50	6.00	-	-	-

CPS[®] Automotive

Advanced Tools
Smart Solutions

CPS Products, Inc. U.S.A.

1010 East 31st Street
Hialeah, Florida 33013, USA
Tel: 305-687-4121, 1-800-277-3808
Fax: 305-687-3743

CPS Products Canada Ltd.

1324 Blundell Road
Mississauga, ON, L4Y 1M5
Tel: 905-615-8620, 1-877-776-8486
Fax: 905-615-9745

CPS Products N.V

Krijgsbaan 241, 2070
Zwijndrecht, Belgium
Tel: (323) 281 30 40
Fax: (323) 281 65 83

CPS Australia PTY. LTD.

109 Welland Avenue
Welland, South Australia 5007
Tel: +61 8 8340 7055
Fax: +61 8 8340 7033

