

Copeland Scroll™

Heating

ZH Scroll Compressors For R410A And R407C/R134a

The Best Choice For Comfort Systems



ZH Scroll R407C/R134a And R410A For Dedicated Heat Pump And Reversible System Applications


Application

The ZH range of Copeland Scroll™ compressors is the market reference for heat pump systems, both dedicated to heating and reversible. ZH compressors feature the market proven Copeland™ reliability and deliver outstanding performances both in new building and retrofit applications. In addition to the existing R407C range, Emerson Climate Technologies has a complete residential and commercial line-up for R410A. OEMs can benefit from it by designing more compact, cost effective and efficient systems.

Features and Benefits


- Copeland Scroll axial and radial compliance for high reliability
- High efficiency and increased heating capacity
- High water temperature for all applications
- Low sound and low vibration level
- Tandem combination for superior seasonal efficiency
- Enhanced vapor injection technology for best seasonal efficiency

ZH / ZH*KVE (R407C) Line-up

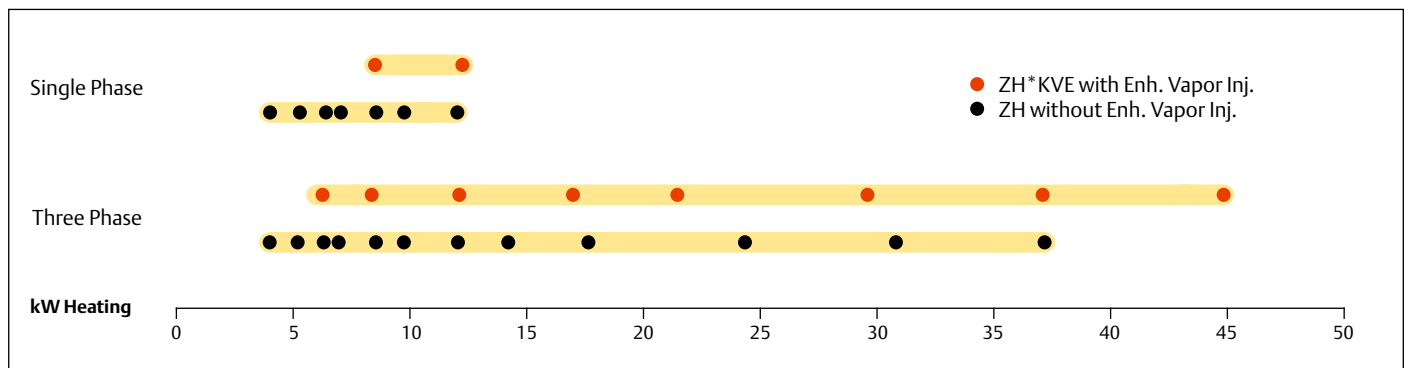


Conditions Heating kW: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat

ZH*P / ZHI*P (R410A) Line-up

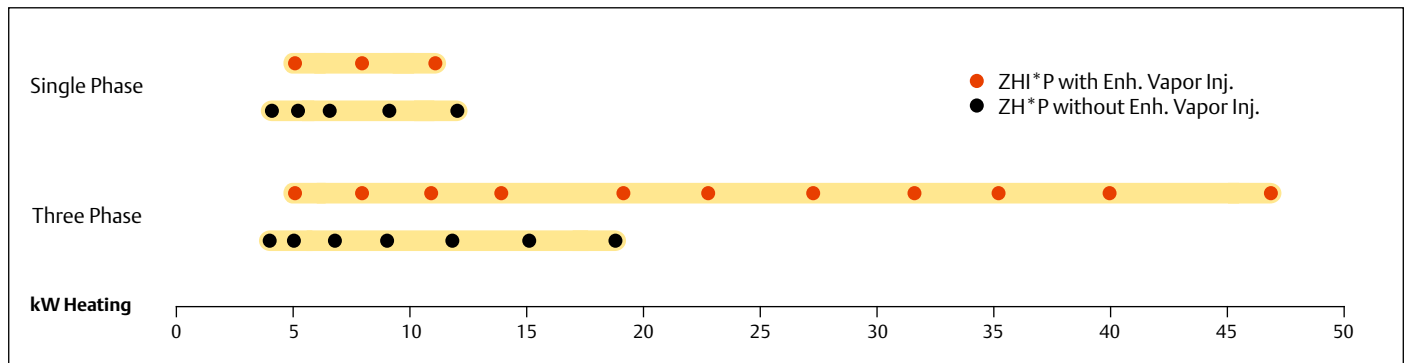


Conditions Heating kW: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat

Operating Envelopes ZH*P / ZHI*P (R410A)

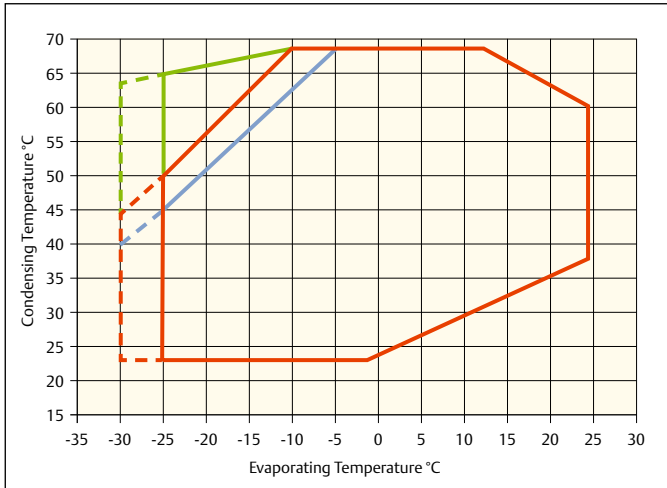

- ZH*P without Enh. Vapor Inj.
- - - ZH*P 2000 hours max.
- ZHI*P with Enh. Vapor Inj.
- - - ZHI*P 2000 hours max.
- Wet Injection

ZH / ZH*KVE (R407C)

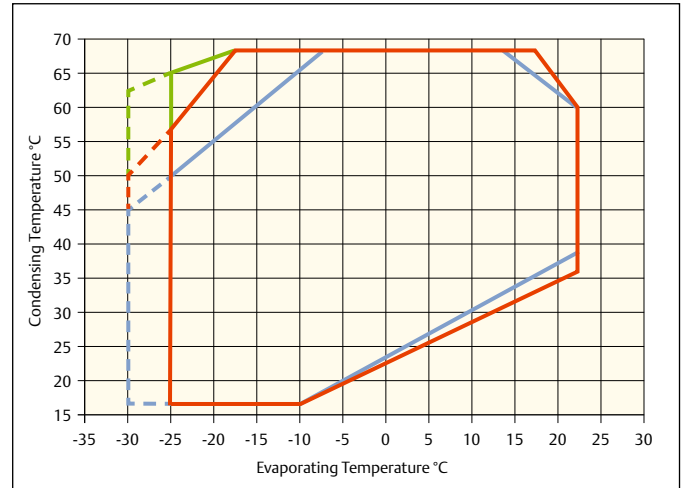

- ZH without Enh. Vapor Inj.
- - - ZH 2000 hours max.
- ZH*KVE with Enh. Vapor Inj.
- - - ZH*KVE 2000 hours max.
- Wet Injection

Technical Overview - ZH R407C / R134a Without Enhanced Vapor Injection

Model	Heating Capacity (kW)		COP		Net Weight (kg)	1 Ph 230V	3Ph 400V	Tandem Ready	Tandem Heating Cap. (kW)	Sound Power (dBA)	Dimensions (mm)				
	R407C	R134a	R407C	R134a							Shell Diameter	W x L	H		
ZH12K4E	3.7	2.6	3.0	3.0	21	PFZ	n.a.		7	71	139	272/193	388		
ZH15K4E	4.7	3.1	3.0	3.0	23	PFJ	TFD	✓	9	71	165	243/242	364		
ZH21K4E	6.5	4.4	3.1	3.1	27				13	72		243/242	387		
ZH26K4E	8.2	5.6	3.1	3.2	28				16	74	243/242	400			
ZH30K4E	9.5	6.5	3.1	3.3	38				19	73	247/241	438			
ZH38K4E	11.7	7.9	3.2	3.3	38	PFZ	TWD	✓	23	74	184	247/241	438		
ZH45K4E	14.0	9.5	3.2	3.3	40	28			75	247/241		438			
ZH56K4E	17.4	11.4	3.1	2.9	93	n.a.			TWD	✓	34	80	283	357/321	525
ZH75K4E	24.2	15.9	3.2	3.1	93						48	81		357/321	525
ZH92K4E	30.7	20.1	3.3	3.2	103		61	83			357/321	532			
ZH11M4E	37.0	24.1	3.3	3.1	112				73	85		357/323	579		

Conditions: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat

Technical Overview - ZH*KVE R407C With Enhanced Vapor Injection

EVI Model	Heating Capacity (kW)	COP	Net Weight (kg)	1 Ph 230V	3Ph 400V	Tandem Ready	Tandem Heating Cap. (kW)	Sound Power (dBA)	Dimensions (mm)		
									Shell Diameter	W x L	H
ZH06KVE	6.2	3.3	27	n.a.	TFM	n.a.	n.a.	69	165	242/242	363
ZH09KVE	8.2	3.3	30	PFZ	TFD	✓	16	73	165	243/243	386
ZH13KVE	11.8	3.4	38	PFJ			23	76	185	244/241	438
ZH18KVE	16.7	3.4	41	n.a.	TWD	✓	33	78		283	244/241
ZH24KVE	21.3	3.3	93				42	80	368/321		525
ZH33KVE	29.5	3.4	93				58	81	368/321		525
ZH40KVE	37.0	3.4	103				73	83	368/321		532
ZH48KVE	44.7	3.4	112				89	85		368/323	579

Conditions: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat



Technical Overview - ZH*P R410A Without Enhanced Vapor Injection

Model	Heating Capacity (kW)	COP	Net Weight (kg)	1 Ph 230V	3Ph 400V	Tandem Ready	Tandem Heating Cap. (kW)	Sound Power (dBA)	Dimensions (mm)		
									Shell Diameter	W x L	H
ZH04K1P	4.2	2.8	22	PFZ	TFM	✓	8.3	70	139	198/229	388
ZH05K1P	5.0	2.8	22				9.9	70		198/229	388
ZH06K1P	6.6	2.9	31				13.1	73	165	246/229	418
ZH09K1P	9.0	3.1	33				17.8	73		246/229	418
ZH12K1P	11.4	3.0	35				23.2	76		246/239	418
ZH15K1P	15.1	3.1	39	n.a.			29.9	78	184	249/245	443
ZH19K1P	18.7	3.2	39				36.6	75		249/245	443

Conditions: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat

Technical Overview - ZHI*P R410A With Enhanced Vapor Injection

EVI Model	Heating Capacity (kW)	COP	Net Weight (kg)	1 Ph 230V	3Ph 400V	Tandem Ready	Tandem Heating Cap. (kW)	Sound Power (dBA)	Dimensions (mm)		
									Shell Diameter	W x L	H
ZHI05K1P	5.2	3.0	22	PFZ	TFM	✓	10.3	70	139	198 x 229	388
ZHI08K1P	8.1	3.1	31				15.6	74	165	246/229	418
ZHI11K1P	10.8	3.3	31				21.3	74		246/229	418
ZHI14K1P	13.9	3.3	31				27.5	75	184	246/239	418
ZHI18K1P	18.8	3.3	39				37.8	78		249/245	443
ZHI23K1P	22.8	3.3	41	45.1	78	249/245	443				
ZHI27K1P	27.0	3.3	63	n.a.	TFD	✓	51.5	77	232	284/264	549
ZHI32K1P	31.8	3.2	63				61.0	75		284/264	549
ZHI35K1P	35.6	3.2	63				68.9	76		284/264	567
ZHI40K1P	39.7	3.3	64				77.4	76		284/264	567
ZHI46K1P	45.9	3.3	65				91.7	78		284/264	567

Conditions: Evaporating -7°C, Condensing 50°C, 4K Subcooling, 5K Superheat

For more details, see www.emersonclimate.eu

Emerson Climate Technologies - European Headquarters - Pascalstrasse 65 - 52076 Aachen, Germany
Tel. +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: www.emersonclimate.eu

The Emerson Climate Technologies logo is a trademark and service mark of Emerson Electric Co. Emerson Climate Technologies Inc. is a subsidiary of Emerson Electric Co. Copeland is a registered trademark and Copeland Scroll is a trademark of Emerson Climate Technologies Inc.. All other trademarks are property of their respective owners. Emerson Climate Technologies GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors. Products, specifications, designs and technical data contained in this document are subject to modification by us without prior notice. Illustrations are not binding.
© 2016 Emerson Climate Technologies, Inc.



EMERSON. CONSIDER IT SOLVED.™